


## A 4

profile rail 48x26 mm, not perforated

profile rail 48x26x2.50 mm, without perforation, slot size 22 mm

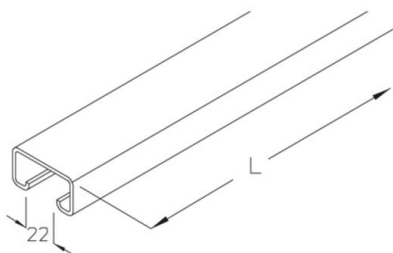

### Bright rolled

Product	H	B	L	t	G
A 4-30B	26 mm	48 mm	3000 mm	2,50 mm	6,7 kg
A 4-60B	26 mm	48 mm	6000 mm	2,50 mm	13,4 kg



### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
A 4-30F	26 mm	48 mm	3000 mm	2,50 mm	7,2 kg
A 4-60F	26 mm	48 mm	6000 mm	2,50 mm	14,4 kg

**H:** height  
**B:** width  
**L:** length  
**t:** material thickness  
**G:** weight

## DETAILS / APPLICATIONS



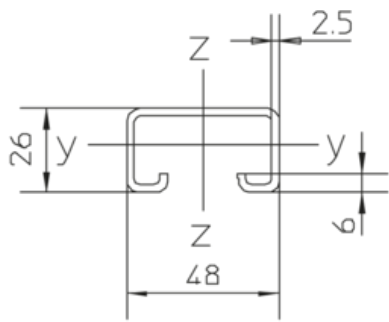

$$\begin{aligned}W_y &= 1.76 \text{ cm}^3 \\W_z &= 3.85 \text{ cm}^3 \\I_y &= 2.64 \text{ cm}^4 \\I_z &= 9.23 \text{ cm}^4\end{aligned}$$

## OPTIONAL ACCESSORIES

HS22, ASK 4

