


B 3

profile rail 28x12 mm, not perforated

profile rail 28x12x2,00 mm, without perforation, slot size 12 mm

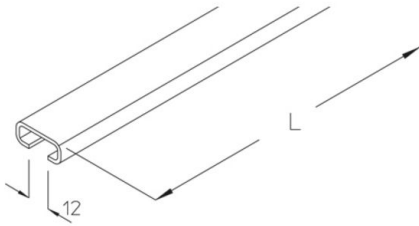

Bright rolled

Product	H	B	L	t	G
B 3-30B	12 mm	28 mm	3000 mm	2,00 mm	2,5 kg
B 3-60B	12 mm	28 mm	6000 mm	2,00 mm	5 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
B 3-30F	12 mm	28 mm	3000 mm	2,00 mm	2,7 kg
B 3-60F	12 mm	28 mm	6000 mm	2,00 mm	5,3 kg

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	t	G
PRS A	-	-	-	-	-
B 3-30E4	12 mm	28 mm	3000 mm	2,00 mm	2,5 kg
B 3-60E4	12 mm	28 mm	6000 mm	2,00 mm	5 kg

H: height

B: width



L: length



PRODUCT INFORMATION

t: material thickness
G: weight

DETAILS / APPLICATIONS

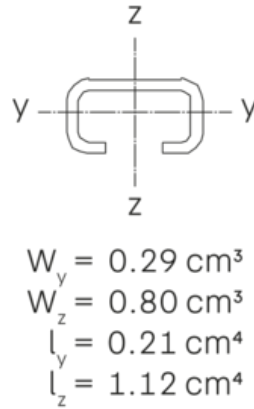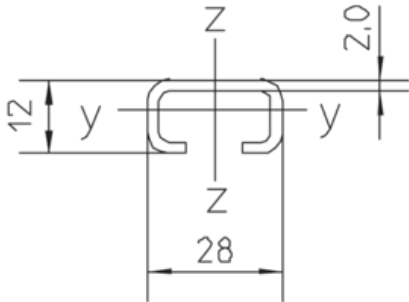

$$\begin{aligned}W_y &= 0.29 \text{ cm}^3 \\W_z &= 0.80 \text{ cm}^3 \\I_y &= 0.21 \text{ cm}^4 \\I_z &= 1.12 \text{ cm}^4\end{aligned}$$

OPTIONAL ACCESSORIES

HS12, AM12

