


## B 6

profile rail 28x15 mm, not perforated

profile rail 28x15x2.30 mm, without perforation, slot size 12 mm

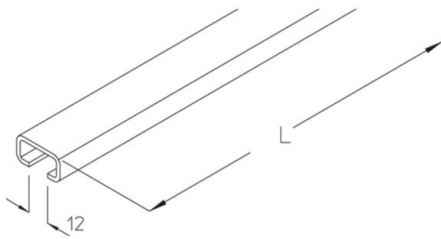

### Bright rolled

Product	H	B	L	t	G
B 6-30B	15 mm	28 mm	3000 mm	2,30 mm	3,1 kg
B 6-60B	15 mm	28 mm	6000 mm	2,30 mm	6,3 kg

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
B 6-30F	15 mm	28 mm	3000 mm	2,30 mm	3,4 kg
B 6-60F	15 mm	28 mm	6000 mm	2,30 mm	6,7 kg

### Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	t	G
B 6-30E	15 mm	28 mm	3000 mm	2,30 mm	3,1 kg
B 6-60E	15 mm	28 mm	6000 mm	2,30 mm	6,3 kg


### Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11



Product	H	B	L	t	G
B 6-30E4	15 mm	28 mm	3000 mm	2,30 mm	3,4 kg
B 6-60E4	15 mm	28 mm	6000 mm	2,30 mm	6,3 kg

**H:** height  
**B:** width  
**L:** length  
**t:** material thickness  
**G:** weight

## DETAILS / APPLICATIONS

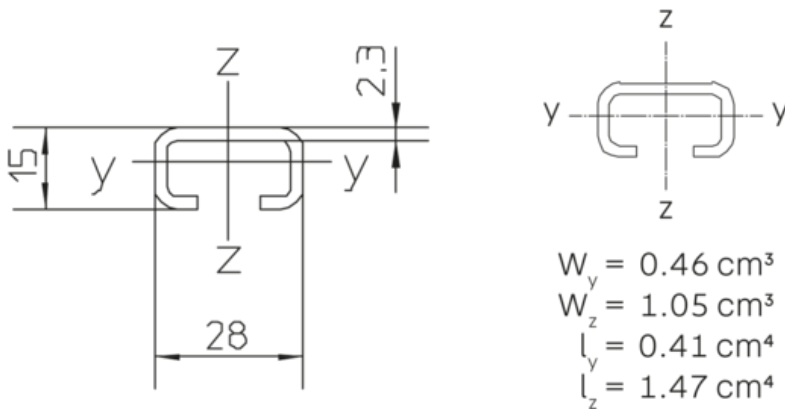

## OPTIONAL ACCESSORIES

HS12, AM12

