

BGIQ

screwed head plate 90° turned, KHI Maintenance of function - Standard support structures

Transverse head plate for mounting of bracket support profile I 80 to ceiling.




The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | H | B | L | G |
|---------------|--------|---------------------------------------|--------|--------|
| BGIQ F | 165 mm | 80 mm | 200 mm | 1,4 kg |
| incl.: | | | | |
| 2x FRS 10X30F | | round-head screw with square, DIN 603 | | |
| 2x SEM 10F | | hexagon-nut, DIN 934 | | |

H: height
B: width
L: length
G: weight

DETAILS / APPLICATIONS

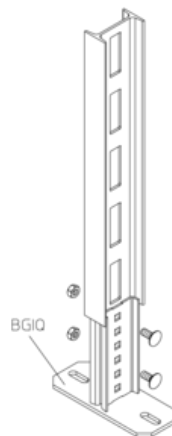



OPTIONAL ACCESSORIES

SD

