


## BL 6

corner angle, KHU 60

Wall angle for fastening bracket supports KHU 60 to walls.

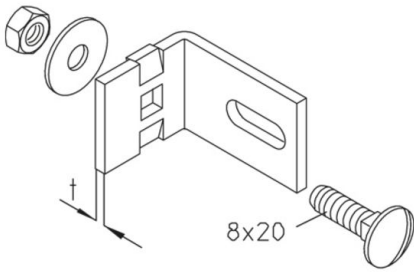

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	t	G
BL 6S	4,00 mm	0,05 kg
incl.:		
1x FRS 8X20	round-head screw with square, DIN 603	
1x SEM 8	hexagon-nut, DIN 934	

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	t	G
BL 6F	4,00 mm	0,05 kg
incl.:		
1x FRS 8X20	round-head screw with square, DIN 603	
1x SEM 8	hexagon-nut, DIN 934	


### Stainless steel, according to ASTM 304 / BS 304 S 3

Product	t	G
BL 6E	3,00 mm	0,05 kg
incl.:		
1x FRS 8X20E	round-head screw with square, DIN 603	
1x SEM 8E	hexagon-nut, DIN 934	



t: material thickness  
G: weight

## DETAILS / APPLICATIONS

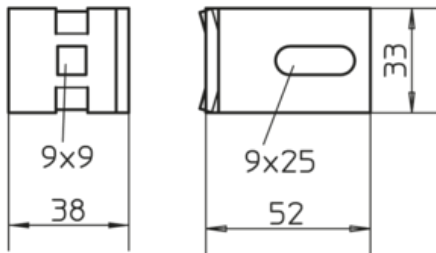

## OPTIONAL ACCESSORIES

STUS 50

