

BODO N3

single outlet with one floor socket, wet maintained, round

Round single outlet with floor cover protection frame. Including pivotable tube as cable outlet, cover, mounting box with strain-relief, claw set and rubber seal. For installation in floor sockets and raised or hollow space floor openings. Equipped with an isolated ground receptacle of 45x45mm and a dummy data cover of 22,5x45mm for Keystone modules. Suitable for rooms with dry and wet-cleaned floor covers. Designed for high traffic loads.

Please mind the technical information in chapter planning.



| | |
|------------------|--|
| material | Tube, cover and tube collet: aluminium or stainless steel / frame and mounting box: plastic material |
| type of assembly | Fixing on floor box UBDHB / rough concrete floor and installation in screed or false floor |
| application area | wet floor cleaning |
| protection class | in use IP 22 / in use with rubber sleeve UGM1-3 IP 43 / not in use IP 66 |
| norm | according to DIN EN 50085 |
| permits | according to VDE / TÜV |
| loading | including inspection stamp Ø 130 mm: 15 kN |

Aluminium

| Product | H | H _{min} | B | E | P _{max} | color | IP _n | IP _g | G |
|-----------------|--------|------------------|--------|--------|------------------|----------|-----------------|-----------------|----------------------------------|
| BODO N3 | 122 mm | 87 mm | 140 mm | 122 mm | 15 kN | aluminum | IP 66 | IP 43 | 0,70 kg |
| incl.: | | | | | | | | | |
| 1x UET80-R-WD | | | | | | | | | tube |
| 1x UETD80-R-WD | | | | | | | | | tube cover |
| 1x UST45-W 1 | | | | | | | | | shockproof socket, single |
| 1x UTG 75 | | | | | | | | | device separation plate |
| 1x UARM-3-1 118 | | | | | | | | | cover plate for 3x UDAE22 |
| 1x UG-R | | | | | | | | | mounting box, round |
| 2x UGM1-3 | | | | | | | | | rubber sleeve |
| 1x UDA22-KS 1 | | | | | | | | | data cover, Keystone, 22,5x45 mm |
| 1x UWZ-IS 8 | | | | | | | | | Allen wrench |
| BODO N3-SW | 122 mm | 87 mm | 140 mm | 122 mm | 15 kN | black | IP 66 | IP 43 | 0,70 kg |



PRODUCT INFORMATION

| Product | H | H _{min} | B | E | P _{max} | color | IP _n | IP _g | G |
|-----------------|---|------------------|---|---|------------------|-------|-----------------|-----------------|----------------------------------|
| incl.: | | | | | | | | | |
| 1x UET80-R-WD | | | | | | | | | tube |
| 1x UETD80-R-WD | | | | | | | | | tube cover |
| 1x UST45-W 1 | | | | | | | | | shockproof socket, single |
| 1x UTG 75 | | | | | | | | | device separation plate |
| 1x UARM-3-1 118 | | | | | | | | | cover plate for 3x UDAE22 |
| 1x UG-R | | | | | | | | | mounting box, round |
| 2x UGM1-3 | | | | | | | | | rubber sleeve |
| 1x UDA22-KS 1 | | | | | | | | | data cover, Keystone, 22,5x45 mm |
| 1x UWZ-IS 8 | | | | | | | | | Allen wrench |

BODO N3-CR 122 mm 87 mm 140 mm 122 mm 15 kN chrome IP 66 IP 43 0,70 kg

| | | | | | | | | | |
|-----------------|--|--|--|--|--|--|--|--|----------------------------------|
| incl.: | | | | | | | | | |
| 1x UET80-R-WD | | | | | | | | | tube |
| 1x UETD80-R-WD | | | | | | | | | tube cover |
| 1x UST45-W 1 | | | | | | | | | shockproof socket, single |
| 1x UTG 75 | | | | | | | | | device separation plate |
| 1x UARM-3-1 118 | | | | | | | | | cover plate for 3x UDAE22 |
| 1x UG-R | | | | | | | | | mounting box, round |
| 2x UGM1-3 | | | | | | | | | rubber sleeve |
| 1x UDA22-KS 1 | | | | | | | | | data cover, Keystone, 22,5x45 mm |
| 1x UWZ-IS 8 | | | | | | | | | Allen wrench |

Brass

| Product | H | H _{min} | B | E | P _{max} | color | IP _n | IP _g | G |
|-----------------|--------|------------------|--------|--------|------------------|--------------|-----------------|-----------------|----------------------------------|
| BODO N3-MMS | 122 mm | 87 mm | 140 mm | 122 mm | 15 kN | brass, solid | IP 66 | IP 43 | 1,47 kg |
| incl.: | | | | | | | | | |
| 1x UET80-R-WD | | | | | | | | | tube |
| 1x UETD80-R-WD | | | | | | | | | tube cover |
| 1x UST45-W 1 | | | | | | | | | shockproof socket, single |
| 1x UTG 75 | | | | | | | | | device separation plate |
| 1x UARM-3-1 118 | | | | | | | | | cover plate for 3x UDAE22 |
| 1x UG-R | | | | | | | | | mounting box, round |
| 2x UGM1-3 | | | | | | | | | rubber sleeve |
| 1x UDA22-KS 1 | | | | | | | | | data cover, Keystone, 22,5x45 mm |
| 1x UWZ-IS 8 | | | | | | | | | Allen wrench |

Stainless steel, according to ASTM 304 / BS 304 S 3

| Product | H | H _{min} | B | E | P _{max} | color | IP _n | IP _g | G |
|-----------|--------|------------------|--------|--------|------------------|------------------------|-----------------|-----------------|---------|
| BODO N3-E | 122 mm | 87 mm | 140 mm | 122 mm | 15 kN | Stainless steel, solid | IP 66 | IP 43 | 1,43 kg |



PRODUCT INFORMATION

| Product | H | H _{min} | B | E | P _{max} | color | IP _n | IP _g | G |
|-----------------|---|------------------|---|---|------------------|----------------------------------|-----------------|-----------------|---|
| incl.: | | | | | | | | | |
| 1x UET80-R-WD | | | | | | tube | | | |
| 1x UETD80-R-WD | | | | | | tube cover | | | |
| 1x UST45-W 1 | | | | | | shockproof socket, single | | | |
| 1x UTG 75 | | | | | | device separation plate | | | |
| 1x UARM-3-1 118 | | | | | | cover plate for 3x UDAE22 | | | |
| 1x UG-R | | | | | | mounting box, round | | | |
| 2x UGM1-3 | | | | | | rubber sleeve | | | |
| 1x UDA22-KS 1 | | | | | | data cover, Keystone, 22,5x45 mm | | | |
| 1x UWZ-IS 8 | | | | | | Allen wrench | | | |

H: height

H_{min}: Minimum installation height

B: width

E: fitting dimension

P_{max}: Maximum load


color:

IP_n: IP protection level in unused condition

IP_g: IP protection level in used condition

G: weight

DETAILS / APPLICATIONS

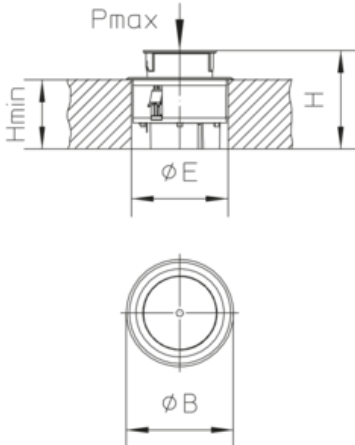

OPTIONAL ACCESSORIES

USK R122, UBDHB 122R





wet-cleaned



Electrical and electronic equipment must not be disposed off via the household waste.

