


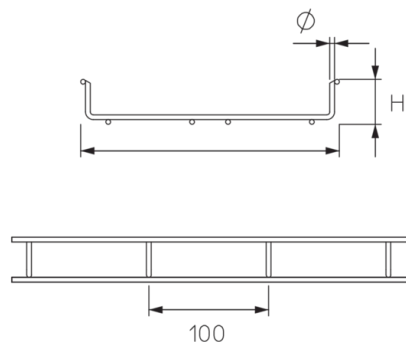

G 35

Mesh cable tray, U-shaped, height = 38 mm

The U-shaped G 35 mesh cable tray has a side height of 38 mm and is available in tray widths from 116 to 618 mm. The standard length is 3004 mm. For the routing of light cables and conduits, especially for direct and raised floor installation and intermediate floors. A variety of materials and finishes are available to meet the corrosion requirements of a wide range of applications.

The GVE mesh cable tray connector must be used for the G 35 mesh cable tray.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	L	Q_{SK}	D	A	G
G 35-10S	116 mm	3004 mm	0,04 kN/m	4,00 mm	29 cm ²	1,690 kg
G 35-15S	166 mm	3004 mm	0,07 kN/m	4,00 mm	43 cm ²	1,850 kg
G 35-20S	216 mm	3004 mm	0,09 kN/m	4,00 mm	58 cm ²	2,590 kg
G 35-30S	316 mm	3004 mm	0,13 kN/m	4,00 mm	87 cm ²	3,500 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	L	Q_{SK}	D	A	G
G 35-10F	116 mm	3004 mm	0,04 kN/m	4,00 mm	29 cm ²	1,810 kg
G 35-15F	166 mm	3004 mm	0,07 kN/m	4,00 mm	29 cm ²	1,810 kg
G 35-20F	216 mm	3004 mm	0,13 kN/m	4,00 mm	87 cm ²	3,740 kg
G 35-30F	316 mm	3004 mm	0,13 kN/m	4,00 mm	87 cm ²	3,740 kg

galvanized, according to ISO 19598 / ISO 2081

Product	B	L	Q_{SK}	D	A	G
G 35-10GV	116 mm	3004 mm	0,04 kN/m	4,00 mm	29 cm ²	1,690 kg
G 35-15GV	166 mm	3004 mm	0,07 kN/m	4,00 mm	43 cm ²	1,850 kg
G 35-20GV	216 mm	3004 mm	0,09 kN/m	4,00 mm	58 cm ²	2,590 kg

Page 1



PRODUCT INFORMATION

Product		B	L	Q_{SK}	D	A	G
G 35-30GV	316 mm	3004 mm	0,13 kN/m	4,00 mm	87 cm ²	3,500 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Product		B	L	Q_{SK}	D	A	G
G 35-10E	116 mm	3004 mm	0,04 kN/m	4,00 mm	43 cm ²	1,690 kg	
G 35-15E	166 mm	3004 mm	0,07 kN/m	4,00 mm	43 cm ²	1,850 kg	
G 35-20E	216 mm	3004 mm	0,09 kN/m	4,00 mm	58 cm ²	2,590 kg	
G 35-30E	316 mm	3004 mm	0,13 kN/m	4,00 mm	87 cm ²	3,500 kg	

:

B: width

L: length

Q_{SK} : distributed load control cable

D: diameter

A: cross section area

G: weight

OPTIONAL ACCESSORIES

GD, GDR, KLU

