


KHA 7

profile rail 39.5x22 mm, perforated Maintenance of function - Standard support structures

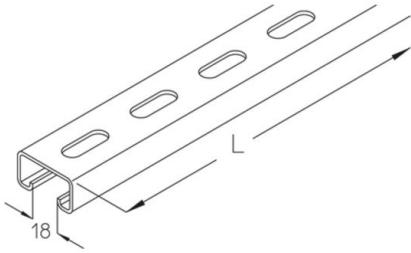

Profile rail 39.5x22x1.50 mm, with continuous perforation 11x30, slot size 18 mm

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish. The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)



Product	H	B	L	t	G
KHA 7-02S	22 mm	39,5 mm	200 mm	1,50 mm	0,21 kg
KHA 7-03S	22 mm	39,5 mm	300 mm	1,50 mm	0,31 kg
KHA 7-04S	22 mm	39,5 mm	400 mm	1,50 mm	0,41 kg
KHA 7-05S	22 mm	39,5 mm	500 mm	1,50 mm	0,51 kg
KHA 7-06S	22 mm	39,5 mm	600 mm	1,50 mm	0,61 kg
KHA 7-07S	22 mm	39,5 mm	700 mm	1,50 mm	0,78 kg
KHA 7-08S	22 mm	39,5 mm	800 mm	1,50 mm	0,83 kg
KHA 7-09S	22 mm	39,5 mm	900 mm	1,50 mm	1,00 kg
KHA 7-10S	22 mm	39,5 mm	1000 mm	1,50 mm	1,05 kg
KHA 7-11S	22 mm	39,5 mm	1100 mm	1,50 mm	1,15 kg
KHA 7-12S	22 mm	39,5 mm	1200 mm	1,50 mm	1,26 kg
KHA 7-13S	22 mm	39,5 mm	1300 mm	1,50 mm	1,36 kg
KHA 7-14S	22 mm	39,5 mm	1400 mm	1,50 mm	1,47 kg
KHA 7-15S	22 mm	39,5 mm	1500 mm	1,50 mm	1,57 kg
KHA 7-20S	22 mm	39,5 mm	2000 mm	1,50 mm	2,20 kg
KHA 7-30S	22 mm	39,5 mm	3000 mm	1,50 mm	3,20 kg
KHA 7-60S	22 mm	39,5 mm	6000 mm	1,50 mm	6,30 kg

H: height
B: width
L: length



t: material thickness
G: weight

DETAILS / APPLICATIONS

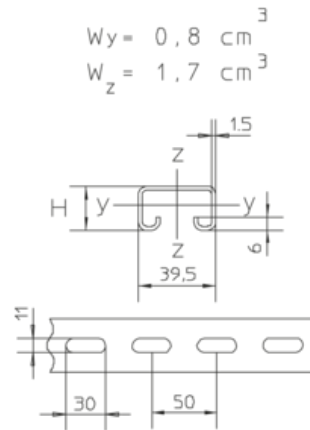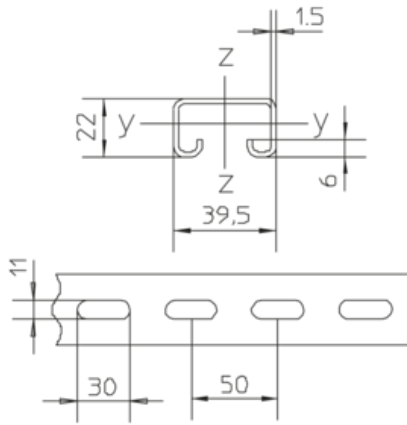

OPTIONAL ACCESSORIES

AC, ASK 8

