


## KHUV 40

connector, KHU 40

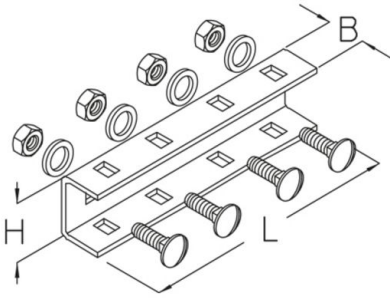

**galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081**

Product	H	B	L	t	G
KHUV 40GV	45 mm	32 mm	210 mm	2,50 mm	0,44 kg
incl.:					
4x FRSV 10X20	round-head screw with short square, DIN 603				
4x SEMS 10	hexagon-nut with flange, DIN EN 1661				

**Continuously hot galvanized (Sendzimir process) (DIN EN 10346)**

Product	H	B	L	t	G
KHUV 40S	45 mm	32 mm	210 mm	2,50 mm	0,45 kg
incl.:					
4x FRSV 10X20	round-head screw with short square, DIN 603				
4x SEM 10	hexagon-nut, DIN 934				

**Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)**

Product	H	B	L	t	G
KHUV 40F	45 mm	32 mm	210 mm	2,50 mm	0,47 kg
incl.:					
4x FRSV 10X20F	round-head screw with short square, DIN 603				
4x SEM 10F	hexagon-nut, DIN 934				



## Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	t	G
KHUV 40E	45 mm	32 mm	210 mm	2,50 mm	0,45 kg
incl.:					
4x FRSV 10X20E	round-head screw with short square, DIN 603				
4x SEM 10E	hexagon-nut, DIN 934				

## Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	t	G
KHUV 40E4	45 mm	32 mm	210 mm	2,50 mm	0,46 kg
incl.:					
4x FRSV 10X20E4	round-head screw with short square, DIN 603				
4x SEM 10E4	hexagon-nut, DIN 934				

**H:** height  
**B:** width  
**L:** length  
**t:** material thickness  
**G:** weight

## DETAILS / APPLICATIONS

