


LGAB 100

cable ladder outside bend, height = 100 mm

cable ladder outside bend 90° for horizontal change of direction

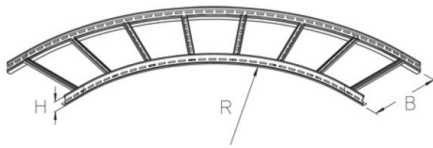

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
LGAB 100-20F	100 mm	200 mm	700 mm	5,71 kg
LGAB 100-30F	100 mm	300 mm	800 mm	6,9 kg
LGAB 100-40F	100 mm	400 mm	900 mm	8,68 kg
LGAB 100-50F	100 mm	500 mm	1000 mm	10,03 kg
LGAB 100-60F	100 mm	600 mm	1100 mm	11,37 kg


Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	R	G
LGAB 100-20E	100 mm	200 mm	700 mm	5,37 kg
LGAB 100-30E	100 mm	300 mm	800 mm	6,49 kg
LGAB 100-40E	100 mm	400 mm	900 mm	8,17 kg
LGAB 100-50E	100 mm	500 mm	1000 mm	9,43 kg
LGAB 100-60E	100 mm	600 mm	1100 mm	10,69 kg

H: height
B: width
R: radius
G: weight



DETAILS / APPLICATIONS

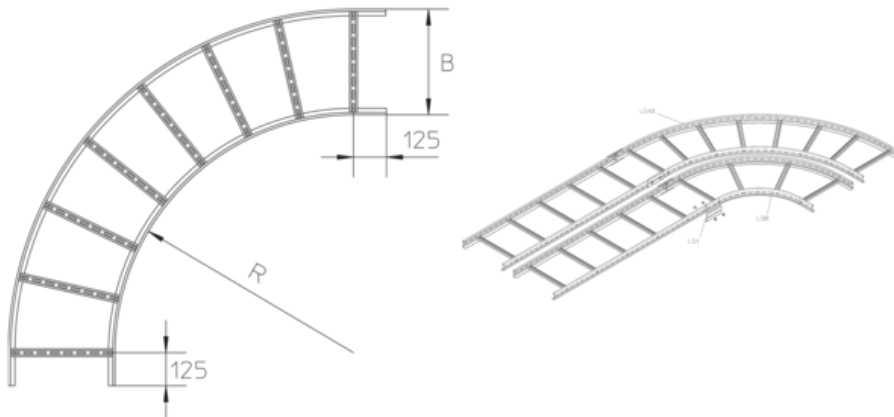

OPTIONAL ACCESSORIES

LGV 100, LGVH 100, LGVV 100, KLU, LGTRV 100



UL classified

