

## LGG 60

vertical cable ladder, L-profile

Cable ladder with continuously perforated side beams. Welded rungs made of profile rail 30x15 mm. Electrical conductivity tested according to DIN EN 61537.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish. The cover RD can only be mounted in conjunction with the cover extension STD-A.



### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B1	B2	L	t	P <sub>max</sub>	G
LGG 60-30-3S	60 mm	303 mm	285 mm	3000 mm	1,5 mm	1,5 kN	8,61 kg
LGG 60-40-3S	60 mm	403 mm	385 mm	3000 mm	1,5 mm	1,5 kN	9,3 kg
LGG 60-50-3S	60 mm	503 mm	485 mm	3000 mm	1,5 mm	1,5 kN	9,98 kg
LGG 60-60-3S	60 mm	603 mm	585 mm	3000 mm	1,5 mm	1,5 kN	10,67 kg
LGG 60-20S	60 mm	203 mm	185 mm	6000 mm	1,5 mm	1,5 kN	15,84 kg
LGG 60-30S	60 mm	303 mm	285 mm	6000 mm	1,5 mm	1,5 kN	17,22 kg
LGG 60-40S	60 mm	403 mm	385 mm	6000 mm	1,5 mm	1,5 kN	18,59 kg
LGG 60-50S	60 mm	503 mm	485 mm	6000 mm	1,5 mm	1,5 kN	19,96 kg
LGG 60-60S	60 mm	603 mm	585 mm	6000 mm	1,5 mm	1,5 kN	21,34 kg

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B1	B2	L	t	P <sub>max</sub>	G
LGG 60-30-3F	60 mm	303 mm	285 mm	3000 mm	1,5 mm	1,5 kN	9,21 kg
LGG 60-40-3F	60 mm	403 mm	385 mm	3000 mm	1,5 mm	1,5 kN	9,95 kg
LGG 60-50-3F	60 mm	503 mm	485 mm	3000 mm	1,5 mm	1,5 kN	10,68 kg
LGG 60-60-3F	60 mm	603 mm	585 mm	3000 mm	1,5 mm	1,5 kN	11,42 kg
LGG 60-20F	60 mm	203 mm	185 mm	6000 mm	1,5 mm	1,5 kN	16,95 kg
LGG 60-30F	60 mm	303 mm	285 mm	6000 mm	1,5 mm	1,5 kN	18,42 kg





Product	H	B1	B2	L	t	P <sub>max</sub>	G
LGG 60-40F	60 mm	403 mm	385 mm	6000 mm	1,5 mm	1,5 kN	19,89 kg
LGG 60-50F	60 mm	503 mm	485 mm	6000 mm	1,5 mm	1,5 kN	21,36 kg
LGG 60-60F	60 mm	603 mm	585 mm	6000 mm	1,5 mm	1,5 kN	22,83 kg


## Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B1	B2	L	t	P <sub>max</sub>	G
LGG 60-30-3E	60 mm	303 mm	285 mm	3000 mm	1,5 mm	1,5 kN	8,66 kg
LGG 60-40-3E	60 mm	403 mm	385 mm	3000 mm	1,5 mm	1,5 kN	9,35 kg
LGG 60-50-3E	60 mm	503 mm	485 mm	3000 mm	1,5 mm	1,5 kN	10,05 kg
LGG 60-60-3E	60 mm	603 mm	585 mm	3000 mm	1,5 mm	1,5 kN	10,74 kg
LGG 60-20E	60 mm	203 mm	185 mm	6000 mm	1,5 mm	1,5 kN	15,95 kg
LGG 60-30E	60 mm	303 mm	285 mm	6000 mm	1,5 mm	1,5 kN	17,33 kg
LGG 60-40E	60 mm	403 mm	385 mm	6000 mm	1,5 mm	1,5 kN	18,71 kg
LGG 60-50E	60 mm	503 mm	485 mm	6000 mm	1,5 mm	1,5 kN	20,09 kg
LGG 60-60E	60 mm	603 mm	585 mm	6000 mm	1,5 mm	1,5 kN	21,47 kg

**H:** height  
**B1:** width  
**B2:** width  
**L:** length  
**t:** material thickness  
**P<sub>max</sub>:** Maximum load  
**G:** weight

## DETAILS / APPLICATIONS



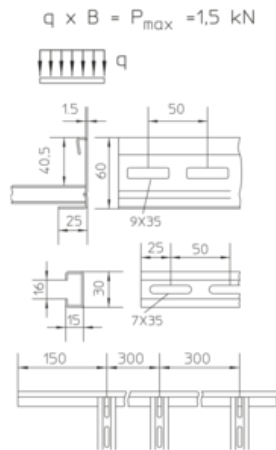

## OPTIONAL ACCESSORIES

H, LGV 60, LGVH 60, LGVV 60, LGTR 60, LGTR 100, STD-A, ST-RD, BL 4, LH, SL 60



UL classified

