

LGG 60

vertical cable ladder, L-profile Maintenance of function - Standard support structures

cable ladder, light duty with continuously perforated side beams, rungs made of profile rail 30x15 mm, certified including electrical conductivity according to DIN EN 61537, max. cable load 20 kg/m, mounting distance max. 1.0 m and max. width 400 mm.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish. The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Product | H | B | L | P _{max} | G |
|--------------|-------|--------|---------|------------------|----------|
| LGG 60-30-3S | 60 mm | 300 mm | 3000 mm | 1,5 kN | 8,61 kg |
| LGG 60-40-3S | 60 mm | 400 mm | 3000 mm | 1,5 kN | 9,3 kg |
| LGG 60-20S | 60 mm | 200 mm | 6000 mm | 1,5 kN | 15,84 kg |
| LGG 60-30S | 60 mm | 300 mm | 6000 mm | 1,5 kN | 17,22 kg |
| LGG 60-40S | 60 mm | 400 mm | 6000 mm | 1,5 kN | 18,59 kg |


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | H | B | L | P _{max} | G |
|--------------|-------|--------|---------|------------------|----------|
| LGG 60-30-3F | 60 mm | 300 mm | 3000 mm | 1,5 kN | 9,21 kg |
| LGG 60-40-3F | 60 mm | 400 mm | 3000 mm | 1,5 kN | 9,95 kg |
| LGG 60-20F | 60 mm | 200 mm | 6000 mm | 1,5 kN | 16,95 kg |
| LGG 60-30F | 60 mm | 300 mm | 6000 mm | 1,5 kN | 18,42 kg |
| LGG 60-40F | 60 mm | 400 mm | 6000 mm | 1,5 kN | 19,89 kg |

H: height
B: width
L: length
P_{max}: Maximum load
G: weight



DETAILS / APPLICATIONS

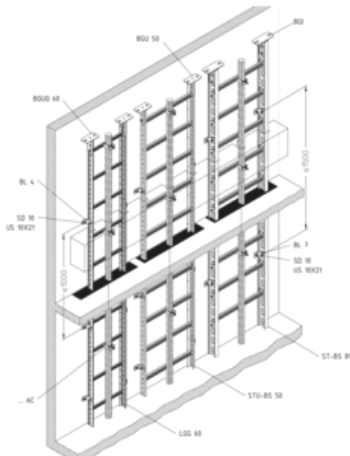

OPTIONAL ACCESSORIES

LGV 60, BL 4, H, BGUQ-BS 60

