


## LGTR 100

cable ladder separating strip, height = 80 mm

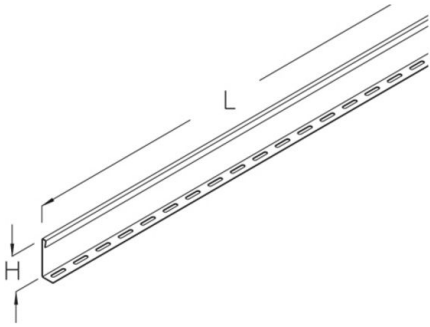

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	L	G
LGTR 100S	80 mm	3000 mm	2,7 kg
incl.:			
3x FKS 6X10	slotted cylinder head screw, DIN EN ISO 1580		
3x AM16 M6F	channel nut, B7		

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	L	G
LGTR 100F	80 mm	3000 mm	2,9 kg
incl.:			
3x FKS 6X10E	slotted cylinder head screw, DIN EN ISO 1580		
3x AM16 M6F	channel nut, B7		

### Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	L	G
LGTR 100E	80 mm	3000 mm	2,7 kg
incl.:			
3x FKS 6X10E	slotted cylinder head screw, DIN EN ISO 1580		
3x AM16 M6E4	channel nut, B7		



**H:** height  
**L:** length  
**G:** weight

## DETAILS / APPLICATIONS

