


## LGTRV 60

Leitertrennsteg, variabel, Höhe = 33 mm

EN: Leitertrennsteg, variabel inkl. Befestigungsschrauben

Kabelkanaltrennung durch Formteile hindurch

Frei biegsam durch Segmente

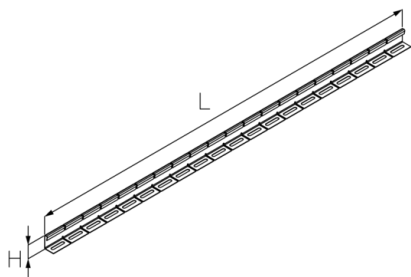

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	G
LGTRV 60S	33 mm	25 mm	1000 mm	0,438 kg
incl.:				
3x FKS 6X10	slotted cylinder head screw, DIN EN ISO 1580			
3x AM16 M6F	channel nut, B7			

### Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	L	G
LGTRV 60E	33 mm	25 mm	1000 mm	0,438 kg
incl.:				
3x FKS 6X10E	slotted cylinder head screw, DIN EN ISO 1580			
3x AM16 M6E4	channel nut, B7			

**H:** height  
**B:** width  
**L:** length  
**G:** weight

## DETAILS / APPLICATIONS



