


## RB-BS45 60

cable tray bend, height = 60 mm Maintenance of function, specified system

cable tray bend 45°, for horizontal change of direction with integrated connectors

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

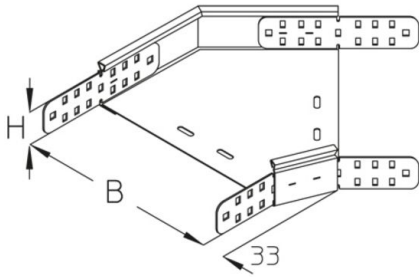

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	G
RB-BS45 60-10S	60 mm	100 mm	0,71 kg
RB-BS45 60-20S	60 mm	200 mm	1,05 kg
RB-BS45 60-30S	60 mm	300 mm	1,4 kg
RB-BS45 60-40S	60 mm	400 mm	1,84 kg
incl.: 4x KLR	clamp fastening set		

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	G
RB-BS45 60-10F	60 mm	100 mm	0,64 kg
RB-BS45 60-20F	60 mm	200 mm	0,9 kg
RB-BS45 60-30F	60 mm	300 mm	1,49 kg
RB-BS45 60-40F	60 mm	400 mm	1,87 kg
incl.: 4x KLR E	clamp fastening set		

**H:** height  
**B:** width  
**G:** weight





## OPTIONAL ACCESSORIES

VB-BS

