

## RG 60

cable tray, perforated, height = 60 mm Maintenance of function, specified system

cable tray perforated, head shape suitable for positive locking covers, with longitudinal and lateral reinforcing rims reducing bottom deflection, certified including electrical conductivity according to DIN EN 61537

The products can be used for fire protection. For technical parameters and cable load  $Q_{SK}$  see National Technical Test Certificates (abPs).



### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	A	$Q_{SK}$	G
RG 60-10S	60 mm	100 mm	3000 mm	0,75 mm	57 cm <sup>2</sup>	0,09 kN/m	4,30 kg
RG 60-20S	60 mm	200 mm	3000 mm	0,75 mm	117 cm <sup>2</sup>	0,18 kN/m	5,80 kg
RG 60-30S	60 mm	300 mm	3000 mm	0,75 mm	177 cm <sup>2</sup>	0,27 kN/m	7,40 kg
RG 60-40S	60 mm	400 mm	3000 mm	0,88 mm	237 cm <sup>2</sup>	0,36 kN/m	10,60 kg

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	A	$Q_{SK}$	G
RG 60-10F	60 mm	100 mm	3000 mm	0,75 mm	57 cm <sup>2</sup>	0,09 kN/m	4,80 kg
RG 60-20F	60 mm	200 mm	3000 mm	0,75 mm	117 cm <sup>2</sup>	0,18 kN/m	6,50 kg
RG 60-30F	60 mm	300 mm	3000 mm	0,75 mm	177 cm <sup>2</sup>	0,27 kN/m	8,30 kg
RG 60-40F	60 mm	400 mm	3000 mm	0,88 mm	237 cm <sup>2</sup>	0,36 kN/m	11,70 kg

**H:** height

**B:** width

**L:** length

**t:** material thickness


**A:** cross section area

**$Q_{SK}$ :** distributed load control cable

**G:** weight



## DETAILS / APPLICATIONS

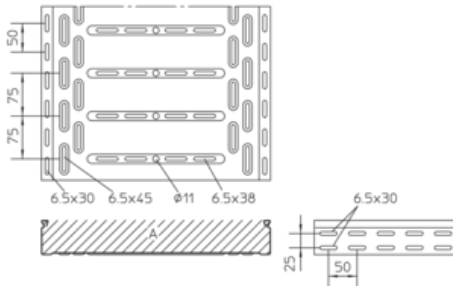

## OPTIONAL ACCESSORIES

RB-BS 60, RB-BS45 60, RAA-BS 60, RGV-BS 60, VB-BS



Do not walk upon!

