

RI 60

cable installation tray, perforated, height = 60 mm

cable installation tray with big side and bottom perforation for leading cables out, head shape suitable for positive locking covers, certified including electrical conductivity according to DIN EN 61537

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	A	Q _{SK}	G
RI 60-05S	60 mm	50 mm	3000 mm	1,00 mm	28 cm ²	0,04 kN/m	3,6 kg
RI 60-10S	60 mm	100 mm	3000 mm	1,00 mm	58 cm ²	0,09 kN/m	4,64 kg
RI 60-15S	60 mm	150 mm	3000 mm	1,00 mm	118 cm ²	0,18 kN/m	5,60 kg
RI 60-20S	60 mm	200 mm	3000 mm	1,00 mm	178 cm ²	0,27 kN/m	6,20 kg
RI 60-30S	60 mm	300 mm	3000 mm	1,00 mm	238 cm ²	0,36 kN/m	8,70 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	A	Q _{SK}	G
RI 60-05F	60 mm	50 mm	3000 mm	1,00 mm	28 cm ²	0,04 kN/m	3,79 kg
RI 60-10F	60 mm	100 mm	3000 mm	1,00 mm	58 cm ²	0,09 kN/m	4,85 kg
RI 60-15F	60 mm	150 mm	3000 mm	1,00 mm	118 cm ²	0,18 kN/m	6,15 kg
RI 60-20F	60 mm	200 mm	3000 mm	1,00 mm	178 cm ²	0,27 kN/m	6,78 kg
RI 60-30F	60 mm	300 mm	3000 mm	1,00 mm	237 cm ²	0,36 kN/m	9,25 kg

Stainless steel, according to ASTM 304 / BS 304 S 3


Product	H	B	L	t	A	Q _{SK}	G
RI 60-05E	60 mm	50 mm	3000 mm	1,00 mm	28 cm ²	0,04 kN/m	3,49 kg



Product	H	B	L	t	A	Q _{SK}	G
RI 60-10E	60 mm	100 mm	3000 mm	1,00 mm	58 cm ²	0,09 kN/m	4,51 kg
RI 60-15E	60 mm	150 mm	3000 mm	1,00 mm	118 cm ²	0,18 kN/m	5,78 kg
RI 60-20E	60 mm	200 mm	3000 mm	1,00 mm	178 cm ²	0,27 kN/m	6,20 kg
RI 60-30E	60 mm	300 mm	3000 mm	1,00 mm	238 cm ²	0,36 kN/m	8,70 kg

H: height
B: width
L: length
t: material thickness
A: cross section area
Q_{SK}: distributed load control cable
G: weight

DETAILS / APPLICATIONS

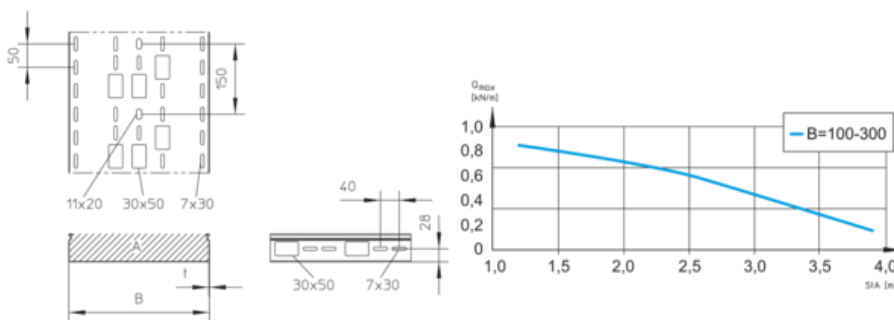

OPTIONAL ACCESSORIES

RIK 60, RID, RIDR, RIB 60, RBD, RIA 60, RAD, RITR 60, RIV 60, VB, REB, KSR 50, SRI 60, KSB, AHB, KLR



Do not walk upon!





UL classified

