


## SD-BS

straddling dowel, fire protection

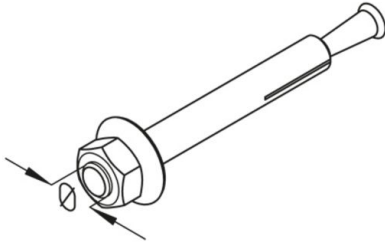

Permissible as single fastening. Permissible load in cracked and non-cracked normal concrete of strength  $\geq$  C20/25. Manufacturer's information has to be observed strictly (ETA-06/0175).

galvanized, according to DIN EN ISO 19598 / DIN EN ISO 2081

Product	$L_{min}$	D	$\emptyset$	t	Pzul	PzulR30	PzulR90	G
SD-BS 6/5	36 mm	6 mm	6 mm	0-5 mm	2,4 kN	1,0 kN	0,4 kN	0,01 kg

$L_{min}$ : Minimum drilling depth

D: diameter

$\emptyset$ : diameter

t: material thickness

Pzul: permissible tractive force

PzulR30: permissible tensile load under the influence of fire (30min)

PzulR90: permissible tensile load under the influence of fire (90min)

G: weight

## DETAILS / APPLICATIONS



