


SKL A

beam clamp set



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | k | P_{max} | M | G |
|------------------|-----------|------------------------------------|-------|-------------|
| SKL A-HDG | 5 - 25 mm | 10 kN | 35 Nm | 0,49 kg/set |
| incl.: | | | | |
| 2x SES 10X55-HDG | | hexagon head bolt, DIN 933 | | |
| 2x AM22 M10-HDG | | channel nut, A 41, KHA 41, KHAL 41 | | |
| 2x UVS M10X24-PE | | captive washer | | |


Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

| Product | k | P_{max} | M | G |
|------------------|-----------|------------------------------------|-------|-------------|
| SKL A-316 | 5 - 25 mm | 10 kN | 35 Nm | 0,49 kg/set |
| incl.: | | | | |
| 2x SES 10X55-316 | | hexagon head bolt, DIN 933 | | |
| 2x AM22 M10-316 | | channel nut, A 41, KHA 41, KHAL 41 | | |
| 2x UVS M10X24-PE | | captive washer | | |

k: clamping range
 P_{max} : Maximum load
M: torque
G: weight



DETAILS / APPLICATIONS

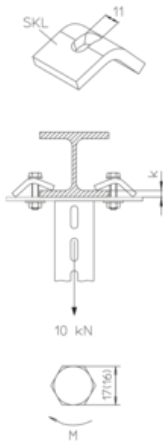

OPTIONAL ACCESSORIES

A 41, KHA 41, KHAL 41

