


## SKLC M

beam clamp set

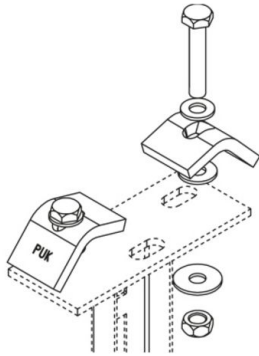

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	k	$P_{max}$	M	G
SKLC M-HDG	5 - 25 mm	10 kN	35 Nm	0,45 kg/set
incl.:				
2x SES 10X55-HDG		hexagon head bolt, DIN 933		
2x SEM 10-HDG		hexagon-nut, DIN 934		
2x US 10X30-HDG		washer, DIN EN ISO 7093		
2x UVS M10X24-PE		captive washer		

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	k	$P_{max}$	M	G
SKLC M-316	5 - 25 mm	10 kN	35 Nm	0,45 kg/set
incl.:				
2x SES 10X55-316		hexagon head bolt, DIN 933		
2x US 10X30-316		washer, DIN EN ISO 7093		
2x SEM 10-316		hexagon-nut, DIN 934		
2x UVS M10X24-PE		captive washer		

**k:** clamping range


**$P_{max}$ :** Maximum load

**M:** torque

**G:** weight



## DETAILS / APPLICATIONS

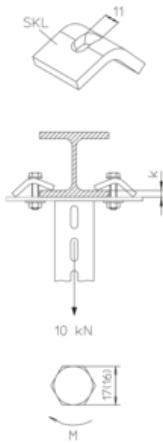

## OPTIONAL ACCESSORIES

KDU 60, KHA 2, HS22

