


SLW

ship ladder angle

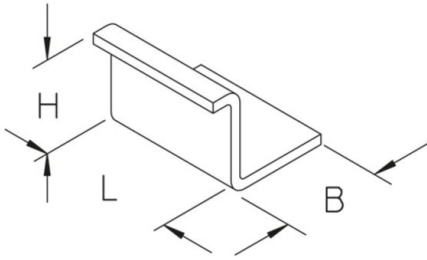

Bright rolled

Product	H	B	L	R	G
SLW 10B	27 mm	31 mm	40 mm	11 mm	0,1 kg
incl.:					
1x SES 10X20F		hexagon head bolt, DIN 933			
1x SEM 10F		hexagon-nut, DIN 934			
1x US 10X21F		washer, DIN EN ISO 7089			

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	R	G
SLW 10F	27 mm	31 mm	40 mm	11 mm	0,1 kg
incl.:					
1x SES 10X20F		hexagon head bolt, DIN 933			
1x SEM 10F		hexagon-nut, DIN 934			
1x US 10X21F		washer, DIN EN ISO 7089			

weld-primed

Product	H	B	L	R	G
SLW 10M	27 mm	31 mm	40 mm	11 mm	0,1 kg





Product	H	B	L	R	G
incl.: 1x SES 10X20F 1x SEM 10F 1x US 10X21F					
		hexagon head bolt, DIN 933 hexagon-nut, DIN 934 washer, DIN EN ISO 7089			

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	R	G
SLW 10-3-HDG	27 mm	31 mm	40 mm	11 mm	0,13 kg
incl.: 1x SES 10X20-HDG 1x SEM 10-HDG		hexagon head bolt, DIN 933 hexagon-nut, DIN 934			
SLW 10-4-HDG	27 mm	31 mm	40 mm	11 mm	0,13 kg
incl.: 1x SES 10X20-HDG 1x SEM 10-HDG		hexagon head bolt, DIN 933 hexagon-nut, DIN 934			


Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	R	G
SLW 10-3-316	27 mm	31 mm	40 mm	11 mm	0,1 kg
incl.: 1x SES 10X20-316 1x SEM 10-316		hexagon head bolt, DIN 933 hexagon-nut, DIN 934			

H: height
B: width
L: length
R: radius
G: weight

DETAILS / APPLICATIONS





R

