


SRTO

tee-tube connector

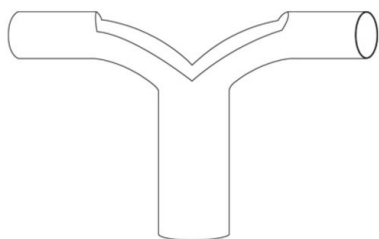

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	D	R	t	G
SRTO 30-HDG	270 mm	100 mm	30 mm	140 mm	1,50 mm	0,80 kg
SRTO 60-HDG	350 mm	100 mm	60 mm	150 mm	2,00 mm	1,10 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	D	R	t	G
SRTO 30-304	270 mm	100 mm	30 mm	140 mm	1,50 mm	0,80 kg
SRTO 60-304	350 mm	100 mm	60 mm	150 mm	2,00 mm	1,10 kg

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	D	R	t	G
SRTO 30-316	270 mm	100 mm	30 mm	140 mm	1,50 mm	0,80 kg
SRTO 60-316	350 mm	100 mm	60 mm	150 mm	2,00 mm	1,10 kg

H: height
B: width
D: diameter
R: radius
t: material thickness





G: weight

