

## ST-BS 81

vertical cable ladder, I-profile Maintenance of function - Standard support structures

vertical ladder, heavy building class, beams made of profile I 80, continuously perforated bars, rungs made of profile rail 40x22 mm for screwing in, max. cable load 20 kg/m, fixing distance max. 1.5 m and max. width 600 mm.

Beams and rungs are delivered not mounted including screws and nuts. Outer dimension = B + 42 mm. The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Product	B	L	G
ST-BS 81-02-3F	200 mm	3000 mm	46,88 kg
incl.: 2x KHI 30F 10x STIS 02F			
bracket support, heavy, 80x42 mm rung			
ST-BS 81-03-3F	300 mm	3000 mm	48,58 kg
incl.: 2x KHI 30F 10x STIS 03F			
bracket support, heavy, 80x42 mm rung			
ST-BS 81-04-3F	400 mm	3000 mm	50,18 kg
incl.: 2x KHI 30F 10x STIS 04F			
bracket support, heavy, 80x42 mm rung			
ST-BS 81-05-3F	500 mm	3000 mm	51,88 kg
incl.: 2x KHI 30F 10x STIS 05F			
bracket support, heavy, 80x42 mm rung			
ST-BS 81-06-3F	600 mm	3000 mm	53,48 kg
incl.: 2x KHI 30F 10x STIS 06F			
bracket support, heavy, 80x42 mm rung			
ST-BS 81-02F	200 mm	6000 mm	93,76 kg
incl.: 2x KHI 60F 20x STIS 02F			
bracket support, heavy, 80x42 mm rung			



Product	B	L	G
ST-BS 81-03F	300 mm	6000 mm	97,16 kg
incl.: 2x KHI 60F 20x STIS 03F bracket support, heavy, 80x42 mm rung			
ST-BS 81-04F	400 mm	6000 mm	100,36 kg
incl.: 2x KHI 60F 20x STIS 04F bracket support, heavy, 80x42 mm rung			
ST-BS 81-05F	500 mm	6000 mm	103,76 kg
incl.: 2x KHI 60F 20x STIS 05F bracket support, heavy, 80x42 mm rung			
ST-BS 81-06F	600 mm	6000 mm	106,96 kg
incl.: 2x KHI 60F 20x STIS 06F bracket support, heavy, 80x42 mm rung			

**B:** width  
**L:** length  
**G:** weight

## DETAILS / APPLICATIONS

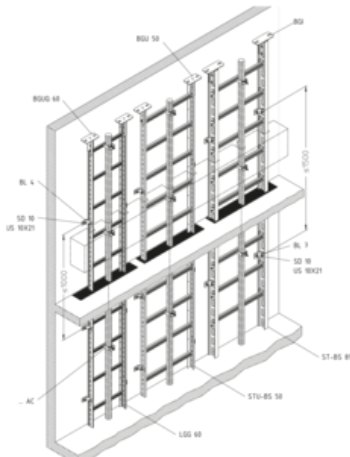



## OPTIONAL ACCESSORIES

BGIQ, BL 7, AC, HKI

