


UBDHB190 1V

hollow space floor box, single, angular



Hollow space floor box for subsonic-noise free and height-undependable assembly, can be used as pull- and installation box, openings for insertion of a shuttering unit that will be replaced with a dummy cover or a floor flush installation unit during final assembly. Consists of a Sendzimir hot-dip galvanized steel sheet box with four bendable side walls and grounding clamp.

material	sheet steel, hot-dip galvanized
type of assembly	Mounting on raw concrete ceiling
application area	Screed-covered duct system, for ducts up to 190 mm width
permits	according to VDE / TÜV
norm	according to DIN EN 50085


Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	H _{min}	B1	B2	L1	L2	E	mounting box	G
UBDHB190 28-160V	31 mm	67 mm	270 mm	290 mm	270 mm	290 mm	165 mm	single	1,2 kg
incl.:									
1x UBDHB-Z			grounding clamp						
UBDHB190 38-160V	41 mm	77 mm	270 mm	290 mm	270 mm	290 mm	165 mm	single	1,9 kg
incl.:									
1x UBDHB-Z			grounding clamp						
UBDHB190 48-160V	51 mm	87 mm	270 mm	290 mm	270 mm	290 mm	165 mm	single	2,0 kg
incl.:									
1x UBDHB-Z			grounding clamp						



H: height
H_{min}: Minimum installation height
B1: width
B2: width
L1: length 1
L2: length 2
E: fitting dimension
mounting box: Maximum number of installable device casings.
G: weight

DETAILS / APPLICATIONS

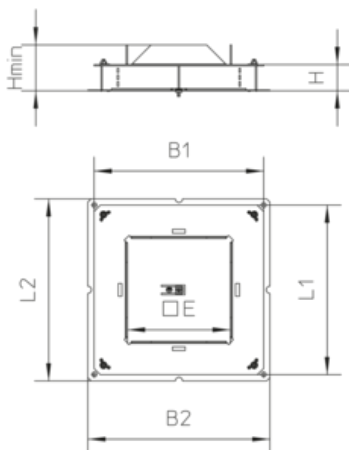

OPTIONAL ACCESSORIES

UN, USK

