


## UBKDB

spacer

Spacer for insertion into the pre-assembled side profile of heavy-duty screed-flush ducts before the screed is filled.

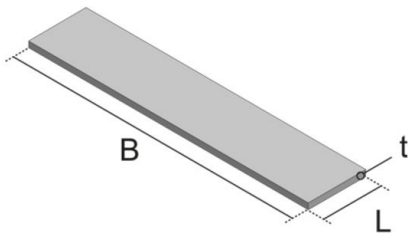

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	L	t	G
UBKDB5 25	242 mm	60 mm	4,00 mm	0,25 kg
UBKDB5 35	342 mm	60 mm	4,00 mm	0,35 kg
UBKDB5 45	442 mm	60 mm	4,00 mm	0,45 kg
UBKDB8 25	254 mm	60 mm	4,00 mm	0,27 kg
UBKDB8 35	354 mm	60 mm	4,00 mm	0,37 kg
UBKDB8 45	454 mm	60 mm	4,00 mm	0,57 kg

**B:** width  
**L:** length  
**t:** material thickness  
**G:** weight

