

UEBD1-2 V E

stainless steel dummy cover single-outlet cartridge, double, angular

Quadrangular single outlet made of stainless steel with hem to accommodate two 45x45 mm installation units. As a height-adjustable cartridge installation frame with dummy cartridge and rubber seal. For the installation in floor sockets and raised or hollow space floor openings. Suitable for rooms with wet-cleaned floor covers. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	cartridge and frame: 2mm high-grade steel V2A, sub construction: sheet steel galvanized
type of assembly	Assembly on floor box UBDHB / rough concrete ceiling
application area	wet floor cleaning
protection class	not in use IP 54
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 / 130 mm: 2 / 3 kN

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	H _{min}	N	B	L	E	T	P _{max}	IP _n	G
UEBD1-2 15-V E	19 mm	80 mm	45 mm	160 mm	160 mm	164 x 164 mm	12 mm	2 kN	IP 54	1,8 kg
incl.: 1x UGD1-2-V 2	rubber seal, angular									
UEBD1-2 25-V E	29 mm	90 mm	45 mm	160 mm	160 mm	164 x 164 mm	22 mm	2 kN	IP 54	1,9 kg
incl.: 1x UGD1-2-V 2	rubber seal, angular									


H: height
H_{min}: Minimum installation height



PRODUCT INFORMATION

N: levelling range
B: width
L: length
E: fitting dimension
T: depth
P_{max}: Maximum load
IP_n: IP protection level in unused condition
G: weight

DETAILS / APPLICATIONS

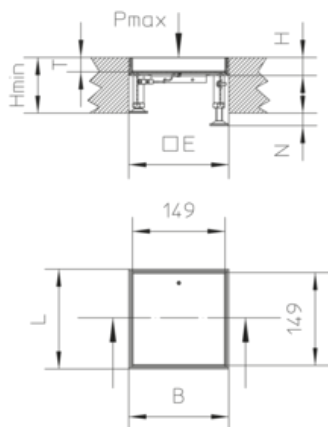

OPTIONAL ACCESSORIES

UGEAV1-2, UGR1-4



wet-cleaned

