


UEBDM V WD

stainless steel tube cover unit, triple, angular

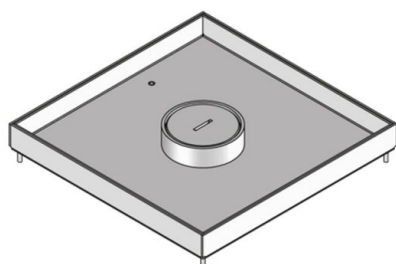

Quadrangular cartridge made of stainless steel sheet with hem. As a levellable cartridge installation frame with a tube outlet cartridge, a screwed-on aluminum tube mounting set and a rubber seal for the installation into floor boxes, assembly covers and raised or hollow floor openings. To accommodate up to 3 mounting boxes equipped with up to 9 suspension bracket installation devices or 12 installation devices of 45x45 mm. Suitable for rooms with wet-cleaned floor covers. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	cartridge and frame: 2mm high-grade steel V2A, tube mounting set: anodized aluminium
type of assembly	fastening to floor box UBDHB7levelling unit UNE
application area	wet floor cleaning
protection class	in use IP 22 / not in use IP 54
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 / 130 mm: 2 / 3 kN

Aluminium

Product	H	H _{min}	B	L	E	T	P _{max}	IP _n	IP _g	G
UEBDM 15-V-WD	19 mm	85 mm	258 mm	258 mm	261 x 261 mm	12 mm	2 kN	IP 54	IP 22	1,9 kg
incl.: 1x UGD3-V 2 4x UKS M4X16E 1x UETD-R-WD										
					rubber seal, square Phillips screw tube cover					
UEBDM 25-V-WD	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	22 mm	2 kN	IP 54	IP 22	2,1 kg



PRODUCT INFORMATION

Product	H	H _{min}	B	L	E	T	P _{max}	IP _n	IP _g	G
incl.: 1x UGD3-V 2 4x UKS M4X16E 1x UETD-R-WD										
UEBDM 35-V-WD	39 mm	105 mm	258 mm	258 mm	261 x 261 mm	32 mm	2 kN	IP 54	IP 22	2,3 kg
incl.: 1x UGD3-V 2 4x UKS M4X16E 1x UETD-R-WD										
UEBDM 45-V-WD	49 mm	115 mm	258 mm	258 mm	261 x 261 mm	42 mm	2 kN	IP 54	IP 22	2,6 kg
incl.: 1x UGD3-V 2 4x UKS M4X16E 1x UETD-R-WD										

Aluminium

Product	H	H _{min}	B	L	E	T	P _{max}	IP _n	IP _g	G
UEBDM 25-V-WD MS	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	16 mm	2 kN	IP 54	IP 22	2,1 kg
incl.: 1x UGD3-V 2 4x UKS M4X16E 1x UETD-R-WD										
UEBDM 35-V-WD MS	39 mm	105 mm	258 mm	258 mm	261 x 261 mm	26 mm	2 kN	IP 54	IP 22	2,3 kg
incl.: 1x UGD3-V 2 4x UKS M4X16E 1x UETD-R-WD										

H: height

H_{min}: Minimum installation height

B: width

L: length

E: fitting dimension

T: depth



PRODUCT INFORMATION


P_{max} : Maximum load

IP_n : IP protection level in unused condition

IP_g : IP protection level in used condition

G: weight

DETAILS / APPLICATIONS

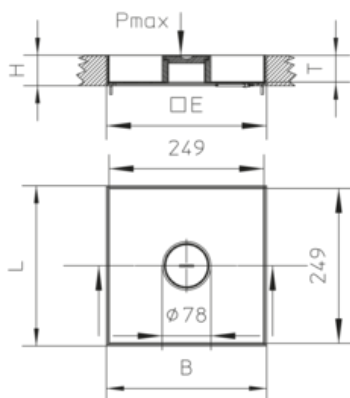

OPTIONAL ACCESSORIES

UEBDME V, UET WD, UNE



wet-cleaned

