


UEBSESK

end piece, cartridge

End piece cartridge, can be adjusted to floor cover height, for the sealing of screed-flush duct.

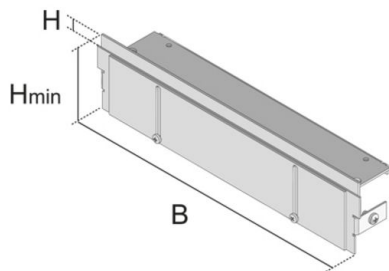

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	H _{min}	N	B	G
UEBSESK15 60-20S	12 mm	60 mm	50 mm	200 mm	0,57 kg
UEBSESK15 60-30S	12 mm	60 mm	50 mm	300 mm	0,88 kg
UEBSESK15 60-40S	12 mm	60 mm	50 mm	400 mm	1,18 kg
UEBSESK15 60-50S	12 mm	60 mm	50 mm	500 mm	1,38 kg
UEBSESK15 100-20S	12 mm	100 mm	50 mm	200 mm	0,68 kg
UEBSESK15 100-30S	12 mm	100 mm	50 mm	300 mm	1,05 kg
UEBSESK15 100-40S	12 mm	100 mm	50 mm	400 mm	1,42 kg
UEBSESK15 100-50S	12 mm	100 mm	50 mm	500 mm	1,68 kg
UEBSESK25 60-20S	22 mm	60 mm	50 mm	200 mm	0,60 kg
UEBSESK25 60-30S	22 mm	60 mm	50 mm	300 mm	0,93 kg
UEBSESK25 60-40S	22 mm	60 mm	50 mm	400 mm	1,25 kg
UEBSESK25 60-50S	22 mm	60 mm	50 mm	500 mm	1,46 kg
UEBSESK25 100-20S	22 mm	100 mm	50 mm	200 mm	0,71 kg
UEBSESK25 100-30S	22 mm	100 mm	50 mm	300 mm	1,21 kg
UEBSESK25 100-40S	22 mm	100 mm	50 mm	400 mm	1,49 kg
UEBSESK25 100-50S	22 mm	100 mm	50 mm	500 mm	1,76 kg

H: height

H_{min}: Minimum installation height

N: levelling range

B: width





G: weight

