

UEKD1-2 V E

stainless steel hinged cover single-outlet cartridge, double, angular

Square floor installation unit with hem to accommodate two installation devices of 45x45 mm. As a height-adjustable cartridge installation frame with cable outlet cartridge, self-locking opening lever, floor-flush cable outlet and rubber seal. Suitable for rooms with dry-cleaned floor covers. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	cartridge and frame: 2mm high-grade steel V2A, sub construction: sheet steel galvanized
type of assembly	Assembly on floor box UBDHB / rough concrete ceiling
application area	dry floor cleaning
protection class	in use IP 20 / not in use IP 30
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 / 130 mm: 2 / 3 kN

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	H _{min}	N	B	L	E	T	P _{max}	IP _n	IP _g	G
UEKD1-2 15-V E	19 mm	80 mm	45 mm	160 mm	160 mm	164 x 164 mm	12 mm	2 kN	IP 30	IP 20	1,12 kg
incl.: 1x UGD1-2-V 2 rubber seal, angular											
UEKD1-2 25-V E	29 mm	90 mm	45 mm	160 mm	160 mm	164 x 164 mm	22 mm	2 kN	IP 30	IP 20	1,30 kg
incl.: 1x UGD1-2-V 2 rubber seal, angular											

Brass




PRODUCT INFORMATION

Product	H	H _{min}	N	B	L	E	T	P _{max}	IP _n	IP _g	G
UEKD1-2 25-V MS	29 mm	90 mm	45 mm	160 mm	160 mm	164 x 164 mm	22 mm	2 kN	IP 30	IP 20	1,30 kg
incl.: 1x UGD1-2-V 2											
				rubber seal, angular							

H: height
H_{min}: Minimum installation height
N: levelling range
B: width
L: length
E: fitting dimension
T: depth
P_{max}: Maximum load
IP_n: IP protection level in unused condition
IP_g: IP protection level in used condition
G: weight

DETAILS / APPLICATIONS

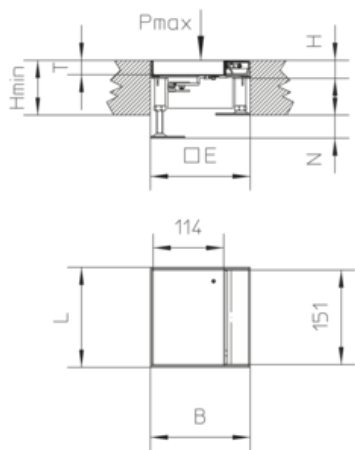

OPTIONAL ACCESSORIES

UGEAV1-2, UGR1-4



dry-cleaned

