


UEKDD VP E

hinged cover cartridge made of stainless steel, triple, angular, flat



Quadrangular installation unit with high-grade steel carpet protection frame. Flat surface, blasted. As a cartridge installation frame with lock-in leads for the gradual lowering of up to 3 mounting boxes (9 coulter clip installation devices or 12 installation devices of 45x45 mm) by up to 30 mm, a self-closing hinged cover as cartridge with floor flush cable outlet and a self-closing opening lever, rubber seal and an all-purpose mounting claw set. For installation into floor boxes, assembly covers and raised or hollow floor openings. Suitable for rooms with dry and damp-cleaned floor covers. Designed for office traffic loads.

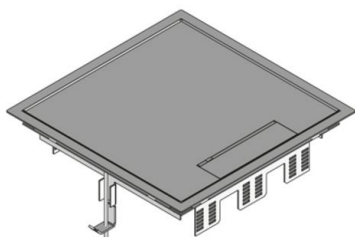

material	cartridge and frame: 2 mm high-grade steel V2A
type of assembly	Assembly in floor box UBDHB, double or hollow floor openings
application area	dry floor cleaning
protection class	in use IP 20 / not in use IP 30
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 / 130 mm: 2 / 3 kN

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	H _{min}	B	L	E	P _{max}	IP _n	IP _g	G
UEKDD 15-VP E	72 mm	90 mm	283 mm	283 mm	261 x 261 mm	2 kN	IP 30	IP 20	5,00 kg
incl.:									
1x UGD-V 2									
2x UDBS 40-80									
					rubber seal, square special claw				

H: height

H_{min}: Minimum installation height

B: width

L: length

E: fitting dimension

P_{max}: Maximum load


IP_n: IP protection level in unused condition

IP_g: IP protection level in used condition



G: weight

DETAILS / APPLICATIONS

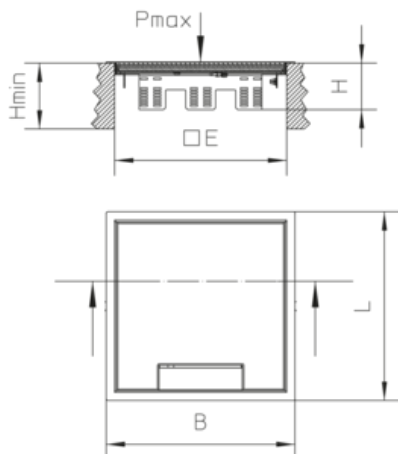

OPTIONAL ACCESSORIES

UDBS 40-80



dry-cleaned

