


## UGWIS-FILS16A

mounting box pre-assembled with FI/LS switch 16 A, Wieland

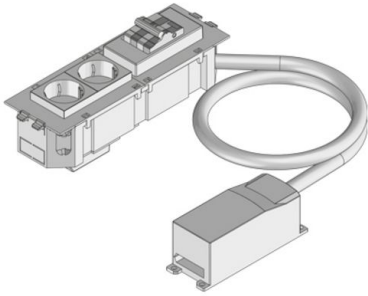

Pre-assembled mounting box with a FI/LS switch 6 KA, 1 p?+?N, 16 A/30 mA, connected to a connecting cable 3x4 mm<sup>2</sup> with flat cable adapter 400 V/32 A for tapping the flat cable 5G10 mm<sup>2</sup>, coded on L1. Complete with a 3 pole Wieland snap-in device socket under the device casing and a double outlet.

### Acrylonitrile-butadiene-styrene copolymer

Product	H	B	L	KQ	connector lead	G
UGWIS-W2FILS16A-300	83 mm	74 mm	225 mm	4 mm <sup>2</sup>	3000 mm	1,93 kg
UGWIS-O2FILS16A-300	83 mm	74 mm	225 mm	4 mm <sup>2</sup>	3000 mm	1,93 kg
UGWIS-W2FILS16A-200	83 mm	74 mm	225 mm	4 mm <sup>2</sup>	2000 mm	1,67 kg
UGWIS-O2FILS16A-200	83 mm	74 mm	225 mm	4 mm <sup>2</sup>	2000 mm	1,67 kg

**H:** height

**B:** width

**L:** length

**KQ:** cable diameter

:

**connector lead:** Connecting cable in mm

**G:** weight

:

