


## UKBS

fire protection partition

Duct fire protection partition as a three-sided S90 cable sealing with floor connection for the installation in an existing wall opening.

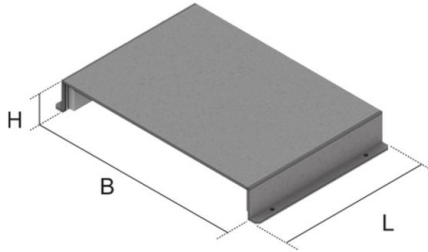

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	E	G
UKBS 28-190S	28 mm	190 mm	270 mm	260 x 56 mm	1,64 kg
UKBS 28-250S	28 mm	250 mm	270 mm	320 x 56 mm	2,50 kg
UKBS 28-350S	28 mm	350 mm	270 mm	420 x 56 mm	3,00 kg
UKBS 38-190S	38 mm	190 mm	270 mm	260 x 70 mm	1,86 kg
UKBS 38-250S	38 mm	250 mm	270 mm	320 x 70 mm	2,20 kg
UKBS 38-350S	38 mm	350 mm	270 mm	420 x 70 mm	2,75 kg
UKBS 48-190S	48 mm	190 mm	270 mm	260 x 83 mm	2,07 kg
UKBS 48-250S	48 mm	250 mm	270 mm	320 x 83 mm	2,42 kg
UKBS 48-350S	48 mm	350 mm	270 mm	420 x 83 mm	3,00 kg

**H:** height  
**B:** width  
**L:** length  
**E:** fitting dimension  
**G:** weight

