


USK

shuttering unit, angular

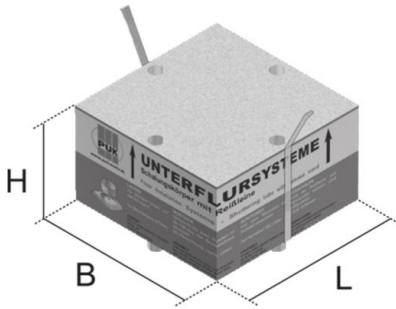

Shuttering formwork made of plastic-coated airpop® (polystyrene) with integrated ripcord, as permanent shuttering. Creates a fixed unit with floor box after insertion into opening on cover sheet.

Caution: insulation strip of max. thickness of 2 mm!
Hexabromocyclododecane (HBCD) free!

| | |
|------------------|--|
| material | plastic-coated airpop® (polystyrene) |
| type of assembly | in hollow space floor box UBDHB or assembly cover UKDA |
| application area | screed-covered duct system |
| norm | according to DIN EN 50085 |
| permits | according to VDE / TÜV |

| Product | H | B | L | E | G |
|--------------|--------|--------|--------|------------|---------|
| USK 160V-150 | 150 mm | 163 mm | 163 mm | 165x165 mm | 0,08 kg |
| USK 185V-150 | 150 mm | 262 mm | 186 mm | 187x262 mm | 0,16 kg |
| USK 259V-150 | 150 mm | 262 mm | 262 mm | 262X262 mm | 0,19 kg |
| USK 259V-225 | 225 mm | 262 mm | 262 mm | 262X262 mm | 0,24 kg |

H: height
B: width
L: length
E: fitting dimension
G: weight

