


UST45 3

shockproof socket, triple

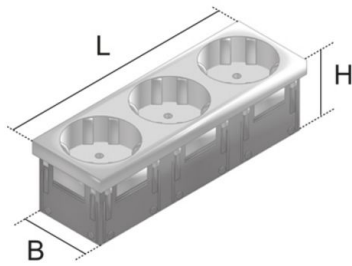

One-piece latchable triple isolated ground receptacle, 45x45 mm design made of plastic with 33° plugging angle, push terminals, increased contact protection according to VDE 0620 and nominal voltage/- current: AC 250 V, 10/16 A.

Polycarbonate

| Product | H | B | L | color | plug angle | G |
|-----------|-------|-------|--------|------------------------------|------------|---------|
| UST45-W 3 | 42 mm | 40 mm | 135 mm | white (similar to RAL 9010) | 33 ° | 0,11 kg |
| UST45-R 3 | 42 mm | 40 mm | 135 mm | red (similar to RAL 3003) | 33 ° | 0,11 kg |
| UST45-O 3 | 42 mm | 40 mm | 135 mm | orange (similar to RAL 2004) | 33 ° | 0,11 kg |
| UST45-G 3 | 42 mm | 40 mm | 135 mm | green (similar to RAL 6029) | 33 ° | 0,11 kg |

H: height

B: width

L: length

color:

plug angle:

G: weight

OPTIONAL ACCESSORIES

UAM 4, UAA B

