


## VB-BS

connection plate Maintenance of function, specified system

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

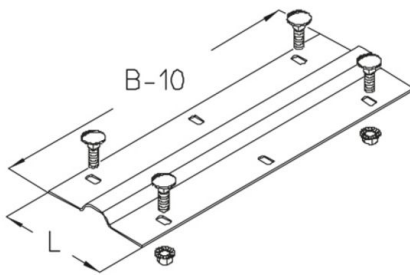

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	L	G
VB-BS 10S	100 mm	99 mm	0,10 kg
VB-BS 20S	200 mm	99 mm	0,21 kg
VB-BS 30S	300 mm	99 mm	0,31 kg
VB-BS 40S	400 mm	99 mm	0,43 kg
incl.: 2x KLR	clamp fastening set		

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	L	G
VB-BS 10F	100 mm	99 mm	0,10 kg
VB-BS 20F	200 mm	99 mm	0,23 kg
VB-BS 30F	300 mm	99 mm	0,33 kg
VB-BS 40F	400 mm	99 mm	0,45 kg
incl.: 2x KLR E	clamp fastening set		

**B:** width  
**L:** length  
**G:** weight



## DETAILS / APPLICATIONS

