

WP 60

wide-span cable ladder, height = 60 mm

Wide-span cable ladder, additional transverse rigidity due to welded rungs, rungs made of profile rail perforated. Electrical conductivity tested according to DIN EN 61537.

Welded construction.




Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	G
WP06-15-HDG	60 mm	150 mm	6000 mm	20,93 kg
WP06-20-HDG	60 mm	200 mm	6000 mm	23,09 kg
WP06-30-HDG	60 mm	300 mm	6000 mm	25,95 kg
WP06-40-HDG	60 mm	400 mm	6000 mm	28,82 kg
WP06-60-HDG	60 mm	600 mm	6000 mm	34,57 kg

H: height
B: width
L: length
G: weight

DETAILS / APPLICATIONS

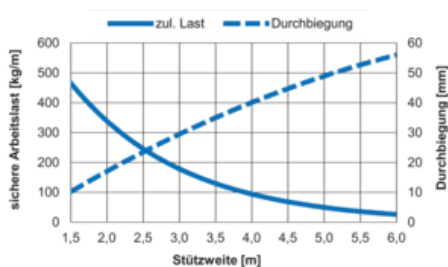



OPTIONAL ACCESSORIES

WPHB 60, WPF-B 60, WPF-C 60, WPF-P 60, WPIR 60, WPOR 60, WPTP 60, WPC 60, WPCH 60, WPCV 60, WPCHV 60, WPS 60, WPF-IS



Do not walk upon!

