


WPCV 100

wide-span connector, vertically adjustable, height = 100 mm



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	L	G
WPCV10-HDG	100 mm	253 mm	1,49 kg
incl.:			
8x KLS 10X20-HDG		clamp fastening set	
2x SEM 10-HDG		hexagon-nut, DIN 934	
2x SES 10X20-HDG		hexagon head bolt, DIN 933	
1x FS 10-304		serrated lock washer	

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	L	G
WPCV10-304	100 mm	253 mm	1,56 kg
incl.:			
8x KLS 10X20-304		clamp fastening set	
2x SEM 10-304		hexagon-nut, DIN 934	
2x SES 10X20-304		hexagon head bolt, DIN 933	
1x FS 10-304		serrated lock washer	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11


Product	H	L	G
WPCV10-316	100 mm	253 mm	1,53 kg



Product	H	L	G
incl.: 8x KLS 10X20-316 2x SEM 10-316 2x SES 10X20-316 1x FS 10-316			clamp fastening set hexagon-nut, DIN 934 hexagon head bolt, DIN 933 serrated lock washer

H: height
L: length
G: weight

DETAILS / APPLICATIONS

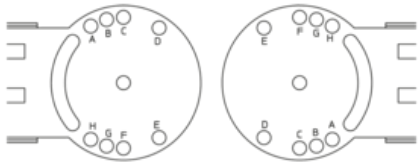

15° C + G
18° E + B
30° A + F
45° B + H
60° A + H

