

## WPCV 150

wide-span connector, vertically adjustable, height = 150 mm

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	L	G
WPCV15-HDG	150 mm	377 mm	2,82 kg
incl.:			
8x KLS 10X20-HDG		clamp fastening set	
2x SEM 10-HDG		hexagon-nut, DIN 934	
2x SES 10X20-HDG		hexagon head bolt, DIN 933	
1x FS 10-304		serrated lock washer	

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	L	G
WPCV15-304	150 mm	377 mm	2,78 kg
incl.:			
8x KLS 10X20-304		clamp fastening set	
2x SEM 10-304		hexagon-nut, DIN 934	
2x SES 10X20-304		hexagon head bolt, DIN 933	
1x FS 10-304		serrated lock washer	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11


Product	H	L	G
WPCV15-316	150 mm	377 mm	2,85 kg



Product	H	L	G
incl.: 8x KLS 10X20-316 2x SEM 10-316 2x SES 10X20-316 1x FS 10-316			clamp fastening set hexagon-nut, DIN 934 hexagon head bolt, DIN 933 serrated lock washer

**H:** height  
**L:** length  
**G:** weight

## DETAILS / APPLICATIONS

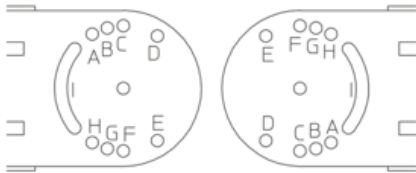

15° C + G  
18° E + B  
30° A + F  
45° B + H  
60° A + H

