


WPHB 100

wide-span bend, height = 100 mm

wide-span cable ladder bend 90° for horizontal change of direction with integrated connectors

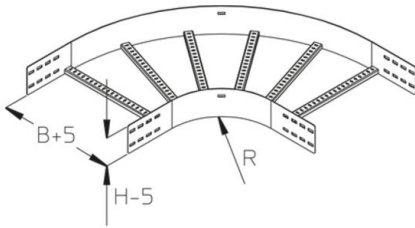

Welded construction. Formed components must be supported at all sides. The following angles are available on request: 30 °, 45 °, 60 °. The following radii are available on request: 300 mm, 600 mm, 900 mm.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Product | H | B | angle | R | G |
|--|--------|--------|-------|--------|----------|
| WPHB10-20-90-45-HDG | 100 mm | 200 mm | 90 ° | 450 mm | 8,60 kg |
| incl.: 8x KLS 10X20-HDG clamp fastening set | | | | | |
| WPHB10-30-90-45-HDG | 100 mm | 300 mm | 90 ° | 450 mm | 9,77 kg |
| incl.: 8x KLS 10X20-HDG clamp fastening set | | | | | |
| WPHB10-40-90-45-HDG | 100 mm | 400 mm | 90 ° | 450 mm | 11,59 kg |
| incl.: 8x KLS 10X20-HDG clamp fastening set | | | | | |
| WPHB10-45-90-45-HDG | 100 mm | 450 mm | 90 ° | 450 mm | 12,25 kg |
| incl.: 8x KLS 10X20-HDG clamp fastening set | | | | | |
| WPHB10-50-90-45-HDG | 100 mm | 500 mm | 90 ° | 450 mm | 13,72 kg |
| incl.: 8x KLS 10X20-HDG clamp fastening set | | | | | |
| WPHB10-60-90-45-HDG | 100 mm | 600 mm | 90 ° | 450 mm | 15,21 kg |
| incl.: 8x KLS 10X20-HDG clamp fastening set | | | | | |
| WPHB10-70-90-45-HDG | 100 mm | 700 mm | 90 ° | 450 mm | 17,82 kg |
| incl.: 8x KLS 10X20-HDG clamp fastening set | | | | | |
| WPHB10-75-90-45-HDG | 100 mm | 750 mm | 90 ° | 450 mm | 18,64 kg |





| Product | H | B | angle | R | G |
|--|--------|---------|-------|--------|----------|
| incl.: 8x KLS 10X20-HDG clamp fastening set | | | | | |
| WPHB10-80-90-45-HDG | 100 mm | 800 mm | 90 ° | 450 mm | 19,47 kg |
| incl.: 8x KLS 10X20-HDG clamp fastening set | | | | | |
| WPHB10-90-90-45-HDG | 100 mm | 900 mm | 90 ° | 450 mm | 22,56 kg |
| incl.: 8x KLS 10X20-HDG clamp fastening set | | | | | |
| WPHB10-100-90-45-HDG | 100 mm | 1000 mm | 90 ° | 450 mm | 24,53 kg |
| incl.: 8x KLS 10X20-HDG clamp fastening set | | | | | |

Stainless steel, according to ASTM 304 / BS 304 S 3

| Product | H | B | angle | R | G |
|--|--------|--------|-------|--------|----------|
| WPHB10-20-90-45-304 | 100 mm | 200 mm | 90 ° | 450 mm | 8,60 kg |
| incl.: 8x KLS 10X20-304 clamp fastening set | | | | | |
| WPHB10-30-90-45-304 | 100 mm | 300 mm | 90 ° | 450 mm | 9,77 kg |
| incl.: 8x KLS 10X20-304 clamp fastening set | | | | | |
| WPHB10-40-90-45-304 | 100 mm | 400 mm | 90 ° | 450 mm | 11,59 kg |
| incl.: 8x KLS 10X20-304 clamp fastening set | | | | | |
| WPHB10-45-90-45-304 | 100 mm | 450 mm | 90 ° | 450 mm | 12,25 kg |
| incl.: 8x KLS 10X20-304 clamp fastening set | | | | | |
| WPHB10-50-90-45-304 | 100 mm | 500 mm | 90 ° | 450 mm | 13,72 kg |
| incl.: 8x KLS 10X20-304 clamp fastening set | | | | | |
| WPHB10-60-90-45-304 | 100 mm | 600 mm | 90 ° | 450 mm | 15,21 kg |
| incl.: 8x KLS 10X20-304 clamp fastening set | | | | | |
| WPHB10-70-90-45-304 | 100 mm | 700 mm | 90 ° | 450 mm | 17,82 kg |





| Product | H | B | angle | R | G |
|----------------------------|--------|---------|-------|--------|---------------------|
| incl.: 8x KLS 10X20-304 | | | | | clamp fastening set |
| WPHB10-75-90-45-304 | 100 mm | 750 mm | 90 ° | 450 mm | 18,64 kg |
| incl.: 8x KLS 10X20-304 | | | | | clamp fastening set |
| WPHB10-80-90-45-304 | 100 mm | 800 mm | 90 ° | 450 mm | 19,47 kg |
| incl.: 8x KLS 10X20-304 | | | | | clamp fastening set |
| WPHB10-90-90-45-304 | 100 mm | 900 mm | 90 ° | 450 mm | 22,56 kg |
| incl.: 8x KLS 10X20-304 | | | | | clamp fastening set |
| WPHB10-100-90-45-304 | 100 mm | 1000 mm | 90 ° | 450 mm | 24,53 kg |
| incl.: 8x KLS 10X20-304 | | | | | clamp fastening set |

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

| Product | H | B | angle | R | G |
|----------------------------|--------|--------|-------|--------|---------------------|
| WPHB10-20-90-45-316 | 100 mm | 200 mm | 90 ° | 450 mm | 8,60 kg |
| incl.: 8x KLS 10X20-316 | | | | | clamp fastening set |
| WPHB10-30-90-45-316 | 100 mm | 300 mm | 90 ° | 450 mm | 9,77 kg |
| incl.: 8x KLS 10X20-316 | | | | | clamp fastening set |
| WPHB10-40-90-45-316 | 100 mm | 400 mm | 90 ° | 450 mm | 11,59 kg |
| incl.: 8x KLS 10X20-316 | | | | | clamp fastening set |
| WPHB10-45-90-45-316 | 100 mm | 450 mm | 90 ° | 450 mm | 12,25 kg |
| incl.: 8x KLS 10X20-316 | | | | | clamp fastening set |
| WPHB10-50-90-45-316 | 100 mm | 500 mm | 90 ° | 450 mm | 13,72 kg |
| incl.: 8x KLS 10X20-316 | | | | | clamp fastening set |
| WPHB10-60-90-45-316 | 100 mm | 600 mm | 90 ° | 450 mm | 15,21 kg |



| Product | H | B | angle | R | G |
|----------------------------|--------|---------|-------|--------|---------------------|
| incl.: 8x KLS 10X20-316 | | | | | clamp fastening set |
| WPHB10-70-90-45-316 | 100 mm | 700 mm | 90 ° | 450 mm | 17,82 kg |
| incl.: 8x KLS 10X20-316 | | | | | clamp fastening set |
| WPHB10-75-90-45-316 | 100 mm | 750 mm | 90 ° | 450 mm | 18,64 kg |
| incl.: 8x KLS 10X20-316 | | | | | clamp fastening set |
| WPHB10-80-90-45-316 | 100 mm | 800 mm | 90 ° | 450 mm | 19,47 kg |
| incl.: 8x KLS 10X20-316 | | | | | clamp fastening set |
| WPHB10-90-90-45-316 | 100 mm | 900 mm | 90 ° | 450 mm | 22,56 kg |
| incl.: 8x KLS 10X20-316 | | | | | clamp fastening set |
| WPHB10-100-90-45-316 | 100 mm | 1000 mm | 90 ° | 450 mm | 24,53 kg |
| incl.: 8x KLS 10X20-316 | | | | | clamp fastening set |

H: height
B: width
angle: angle
R: radius
G: weight

DETAILS / APPLICATIONS

