


## WPHB 150

wide-span bend, height = 150 mm

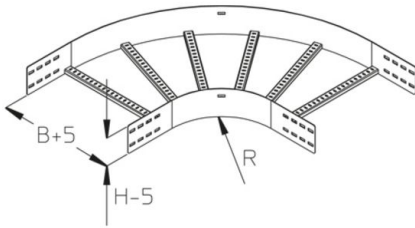

wide-span cable ladder bend 90° for horizontal change of direction with integrated connectors

Welded construction. Formed components must be supported at all sides. The following angles are available on request: 30 °, 45 °, 60 °. The following radii are available on request: 300 mm, 600 mm, 900 mm.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	angle	R	G
WPHB15-20-90-45-HDG	150 mm	200 mm	90 °	450 mm	12,12 kg
incl.: 8x KLS 10X20-HDG clamp fastening set					
WPHB15-30-90-45-HDG	150 mm	300 mm	90 °	450 mm	13,49 kg
incl.: 8x KLS 10X20-HDG clamp fastening set					
WPHB15-40-90-45-HDG	150 mm	400 mm	90 °	450 mm	15,51 kg
incl.: 8x KLS 10X20-HDG clamp fastening set					
WPHB15-45-90-45-HDG	150 mm	450 mm	90 °	450 mm	16,27 kg
incl.: 8x KLS 10X20-HDG clamp fastening set					
WPHB15-50-90-45-HDG	150 mm	500 mm	90 °	450 mm	17,84 kg
incl.: 8x KLS 10X20-HDG clamp fastening set					
WPHB15-60-90-45-HDG	150 mm	600 mm	90 °	450 mm	19,52 kg
incl.: 8x KLS 10X20-HDG clamp fastening set					
WPHB15-70-90-45-HDG	150 mm	700 mm	90 °	450 mm	22,33 kg
incl.: 8x KLS 10X20-HDG clamp fastening set					
WPHB15-75-90-45-HDG	150 mm	750 mm	90 °	450 mm	23,26 kg





Product	H	B	angle	R	G
incl.: 8x KLS 10X20-HDG					clamp fastening set
WPHB15-80-90-45-HDG	150 mm	800 mm	90 °	450 mm	24,18 kg
incl.: 8x KLS 10X20-HDG					clamp fastening set
WPHB15-90-90-45-HDG	150 mm	900 mm	90 °	450 mm	27,46 kg
incl.: 8x KLS 10X20-HDG					clamp fastening set
WPHB15-100-90-45-HDG	150 mm	1000 mm	90 °	450 mm	29,73 kg
incl.: 8x KLS 10X20-HDG					clamp fastening set

### Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	angle	R	G
WPHB15-20-90-45-304	150 mm	200 mm	90 °	450 mm	12,12 kg
WPHB15-30-90-45-304	150 mm	300 mm	90 °	450 mm	13,49 kg
WPHB15-40-90-45-304	150 mm	400 mm	90 °	450 mm	15,51 kg
WPHB15-45-90-45-304	150 mm	450 mm	90 °	450 mm	16,27 kg
WPHB15-50-90-45-304	150 mm	500 mm	90 °	450 mm	17,84 kg
WPHB15-60-90-45-304	150 mm	600 mm	90 °	450 mm	19,52 kg
WPHB15-70-90-45-304	150 mm	700 mm	90 °	450 mm	22,33 kg
WPHB15-75-90-45-304	150 mm	750 mm	90 °	450 mm	23,26 kg
WPHB15-80-90-45-304	150 mm	800 mm	90 °	450 mm	24,18 kg
WPHB15-90-90-45-304	150 mm	900 mm	90 °	450 mm	27,46 kg
WPHB15-100-90-45-304	150 mm	1000 mm	90 °	450 mm	29,73 kg

### Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	angle	R	G
WPHB15-20-90-45-316	150 mm	200 mm	90 °	450 mm	12,12 kg
WPHB15-30-90-45-316	150 mm	300 mm	90 °	450 mm	13,49 kg
WPHB15-40-90-45-316	150 mm	400 mm	90 °	450 mm	15,51 kg



Product	H	B	angle	R	G
WPHB15-45-90-45-316	150 mm	450 mm	90 °	450 mm	16,27 kg
WPHB15-50-90-45-316	150 mm	500 mm	90 °	450 mm	17,84 kg
WPHB15-60-90-45-316	150 mm	600 mm	90 °	450 mm	19,52 kg
WPHB15-70-90-45-316	150 mm	700 mm	90 °	450 mm	22,33 kg
WPHB15-75-90-45-316	150 mm	750 mm	90 °	450 mm	23,26 kg
WPHB15-80-90-45-316	150 mm	800 mm	90 °	450 mm	24,18 kg
WPHB15-90-90-45-316	150 mm	900 mm	90 °	450 mm	27,46 kg
WPHB15-100-90-45-316	150 mm	1000 mm	90 °	450 mm	29,73 kg

**H:** height  
**B:** width  
**angle:** angle  
**R:** radius  
**G:** weight

## DETAILS / APPLICATIONS

