


B 6

montageprofiel 28x15 mm, niet geperforeerd

montageprofiel 28x15x2,30 mm, zonder perforatie, sleufmaat 12 mm

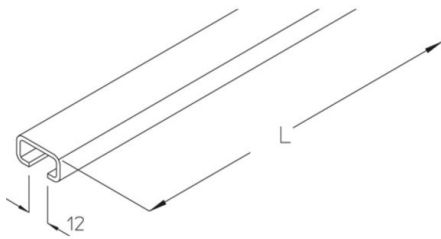

Walsblank

Product	H	B	L	t	G
B 6-30B	15 mm	28 mm	3000 mm	2,30 mm	3,1 kg
B 6-60B	15 mm	28 mm	6000 mm	2,30 mm	6,3 kg

Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
B 6-30F	15 mm	28 mm	3000 mm	2,30 mm	3,4 kg
B 6-60F	15 mm	28 mm	6000 mm	2,30 mm	6,7 kg

Roestvrij staal, volgens ASTM 304 / BS 304 S 3

Product	H	B	L	t	G
B 6-30E	15 mm	28 mm	3000 mm	2,30 mm	3,1 kg
B 6-60E	15 mm	28 mm	6000 mm	2,30 mm	6,3 kg


Roestvrij staal volgens ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11



Product	H	B	L	t	G
B 6-30E4	15 mm	28 mm	3000 mm	2,30 mm	3,4 kg
B 6-60E4	15 mm	28 mm	6000 mm	2,30 mm	6,3 kg

H: hoogte
B: breedte
L: lengte
t: materiaaldikte
G: gewicht

DETAILS / TOEPASSINGEN

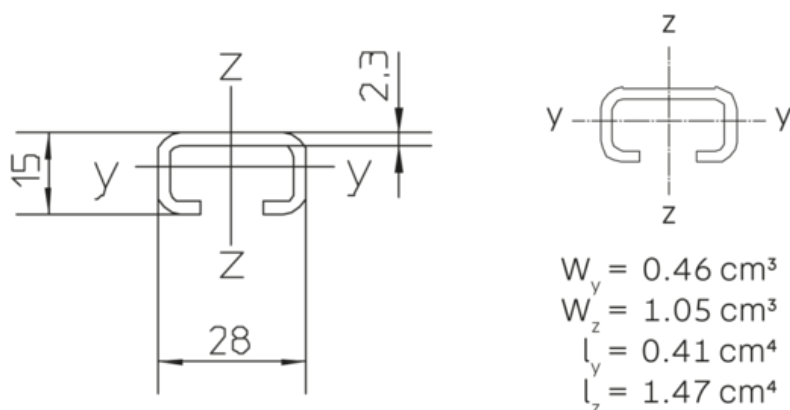

OPTIONELE TOEBEHOREN

HS12, AM12

