

KDU 60

consolehouder, zwaar, 60x40 mm Vluchtweginstallatie

zware console t.b.v. U-profiel 60x40x4 mm, driezijdig geperforeerd, gelaste kopplaat, volgens DIN EN 61537


Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	L	t	G
KDU 60-02F	200 mm	6,00 mm	1,4 kg
KDU 60-03F	300 mm	6,00 mm	1,8 kg
KDU 60-04F	400 mm	6,00 mm	2,1 kg
KDU 60-05F	500 mm	6,00 mm	2,5 kg
KDU 60-06F	600 mm	6,00 mm	2,8 kg
KDU 60-07F	700 mm	6,00 mm	3,2 kg
KDU 60-08F	800 mm	6,00 mm	3,5 kg
KDU 60-09F	900 mm	6,00 mm	3,9 kg
KDU 60-10F	1000 mm	6,00 mm	4,2 kg
KDU 60-11F	1100 mm	8,00 mm	4,8 kg
KDU 60-12F	1200 mm	8,00 mm	5,2 kg
KDU 60-13F	1300 mm	8,00 mm	5,5 kg
KDU 60-14F	1400 mm	8,00 mm	5,9 kg
KDU 60-15F	1500 mm	8,00 mm	6,3 kg
KDU 60-16F	1600 mm	8,00 mm	6,6 kg
KDU 60-17F	1700 mm	8,00 mm	7 kg
KDU 60-18F	1800 mm	8,00 mm	7,3 kg
KDU 60-19F	1900 mm	8,00 mm	7,7 kg
KDU 60-20F	2000 mm	8,00 mm	8,0 kg



L: lengte
t: materiaaldikte
G: gewicht

DETAILS / TOEPASSINGEN

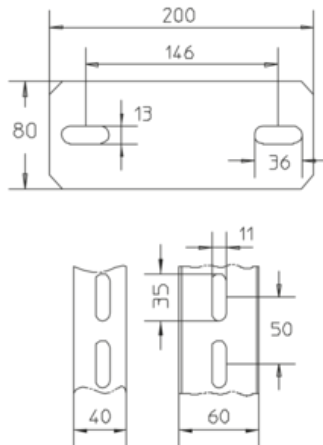

OPTIONELE TOEBEHOREN

KHUSS 60, KW-BS, SD, SAZ

