


## KLU-L

Beugel

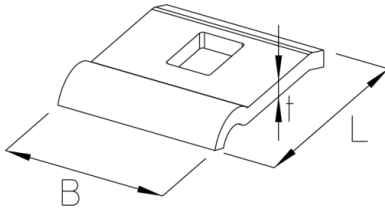

### Verzinkt volgens DIN EN ISO 19598 / DIN EN ISO 2081

Product	H	B	L	t	G
KLU-L GV	5,5 mm	25 mm	30 mm	2,5 mm	0,013 kg

### Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KLU-L F	5,5 mm	25 mm	30 mm	2,5 mm	0,013 kg

### Roestvrij staal, volgens ASTM 304 / BS 304 S 3

Product	H	B	L	t	G
KLU-L E	5,5 mm	25 mm	30 mm	2,5 mm	0,014 kg

### Roestvrij staal volgens ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	t	G
KLU-L E4	5,5 mm	25 mm	30 mm	2,5 mm	0,014 kg



**H:** hoogte  
**B:** breedte  
**L:** lengte  
**t:** materiaaldikte  
**G:** gewicht

## DETAILS / TOEPASSINGEN

