


LGA 100

kabelladder T-stuk, hoogte=100 mm

kabelladder T-stuk

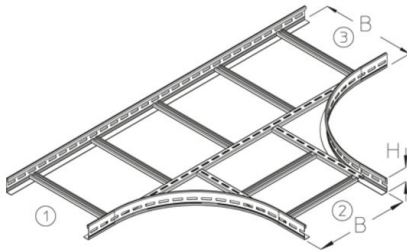

Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
LGA 100-20F	100 mm	200 mm	400 mm	5,62 kg
LGA 100-30F	100 mm	300 mm	400 mm	6,37 kg
LGA 100-40F	100 mm	400 mm	400 mm	7,12 kg
LGA 100-50F	100 mm	500 mm	400 mm	7,86 kg
LGA 100-60F	100 mm	600 mm	400 mm	8,61 kg


Roestvrij staal, volgens ASTM 304 / BS 304 S 3

Product	H	B	R	G
LGA 100-20E	100 mm	200 mm	400 mm	5,28 kg
LGA 100-30E	100 mm	300 mm	400 mm	5,99 kg
LGA 100-40E	100 mm	400 mm	400 mm	6,69 kg
LGA 100-50E	100 mm	500 mm	400 mm	7,4 kg
LGA 100-60E	100 mm	600 mm	400 mm	8,1 kg

H: hoogte
B: breedte
R: radius
G: gewicht



DETAILS / TOEPASSINGEN

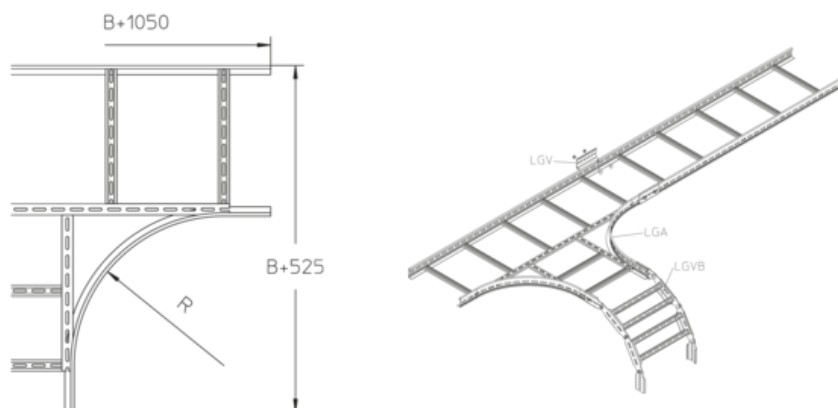

OPTIONELE TOEBEHOREN

LGV 100, LGVH 100, LGVV 100, KLU, LAD, LADR, LGTRV 100



UL geclassificeerd

