


LKD

Deksel voor kruisstuk kabelladder

Deksel voor kruisstuk kabelladder

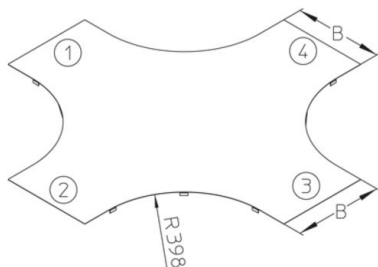

Continu thermisch verzinkt (Sendzimir-techniek) (DIN EN 10346)

Product	B	R	t	G
LKD 20S	204 mm	398 mm	0,75 mm	3,74 kg
LKD 30S	304 mm	398 mm	1,00 mm	6,97 kg
LKD 40S	404 mm	398 mm	1,00 mm	9,16 kg
LKD 50S	504 mm	398 mm	1,25 mm	14,35 kg
LKD 60S	604 mm	398 mm	1,25 mm	18,07 kg

Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	B	R	t	G
LKD 20F	204 mm	398 mm	0,75 mm	4,00 kg
LKD 30F	304 mm	398 mm	1,00 mm	7,46 kg
LKD 40F	404 mm	398 mm	1,00 mm	9,8 kg
LKD 50F	504 mm	398 mm	1,25 mm	15,35 kg
LKD 60F	604 mm	398 mm	1,25 mm	19,33 kg

Roestvrij staal, volgens ASTM 304 / BS 304 S 3

Product	B	R	t	G
LKD 20E	204 mm	398 mm	0,80 mm	4,00 kg





Product	B	R	t	G
LKD 30E	304 mm	398 mm	1,00 mm	7,01 kg
LKD 40E	404 mm	398 mm	1,00 mm	9,22 kg
LKD 50E	504 mm	398 mm	1,25 mm	14,45 kg
LKD 60E	604 mm	398 mm	1,25 mm	18,22 kg

B: breedte

R: radius

t: materiaaldikte

G: gewicht

