


## RIKDS

Installatie afdekking kanaalovergang, zwaar

Gootovergangsdeksel, vormsluitend

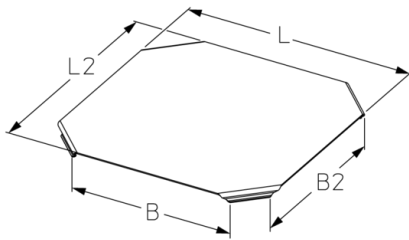

### Continu thermisch verzinkt (Senzimir-techniek) (DIN EN 10346)

Product	L1	L2	B1	B2	t	G
RIKDS 05S	164 mm	164 mm	50 mm	50 mm	1,5 mm	0,31 kg
RIKDS 10S	214 mm	214 mm	100 mm	100 mm	1,5 mm	0,54 kg
RIKDS 20S	314 mm	314 mm	200 mm	200 mm	1,5 mm	1,21 kg
RIKDS 30S	414 mm	414 mm	300 mm	300 mm	1,5 mm	2,13 kg
RIKDS 10-05S	214 mm	164 mm	100 mm	50 mm	1,5 mm	0,41 kg
RIKDS 20-10S	314 mm	214 mm	200 mm	100 mm	1,5 mm	0,81 kg
RIKDS 30-20S	414 mm	314 mm	300 mm	200 mm	1,5 mm	1,61 kg

**L1:** lengte 1

**L2:** lengte 2

**B1:** breedte

**B2:** breedte

**t:** materiaaldikte

**G:** gewicht

