


SR

kabelbeschermbuis, lengte = 6000 mm

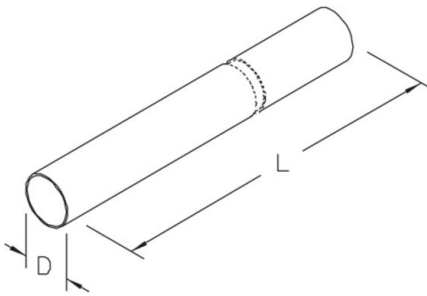

Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	L	D	t	G
SR 30F	6000 mm	30 mm	1,50 mm	6,65 kg
SR 60F	6000 mm	60 mm	2,00 mm	17,4 kg

Roestvrij staal, volgens ASTM 304 / BS 304 S 3

Product	L	D	t	G
SR 30E	6000 mm	30 mm	1,50 mm	6,65 kg
SR 60E	6000 mm	60 mm	2,00 mm	17,4 kg

Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	L	D	t	G
SR 30-HDG	6000 mm	30 mm	1,50 mm	6,65 kg
SR 60-HDG	6000 mm	60 mm	2,00 mm	17,40 kg

Roestvrij staal, volgens ASTM 304 / BS 304 S 3



Product	L	D	t	G
SR 30-304	6000 mm	30 mm	1,50 mm	6,65 kg
SR 60-304	6000 mm	60 mm	2,00 mm	17,4 kg

Roestvrij staal volgens ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	L	D	t	G
SR 30-316	6000 mm	30 mm	1,50 mm	6,65 kg
SR 60-316	6000 mm	60 mm	2,00 mm	17,4 kg

L: lengte
D: diameter
t: materiaaldikte
G: gewicht

DETAILS / TOEPASSINGEN

