


WPCO

wide-span kabelladder deksel

Meer informatie over welk aantal van vormdeel-dekselklemmen u nodig heeft, leest u in onze aanvullende informatie.

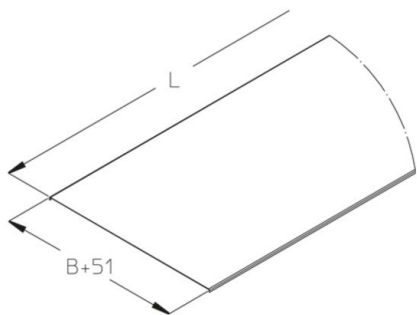

Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	B	L	G
WPCO20-HDG	200 mm	3000 mm	5,08 kg
WPCO30-HDG	300 mm	3000 mm	9,30 kg
WPCO40-HDG	400 mm	3000 mm	11,82 kg
WPCO45-HDG	450 mm	3000 mm	16,35 kg
WPCO50-HDG	500 mm	1500 mm	8,96 kg
WPCO60-HDG	600 mm	1500 mm	10,54 kg
WPCO70-HDG	700 mm	1500 mm	14,53 kg
WPCO75-HDG	750 mm	1500 mm	15,48 kg
WPCO80-HDG	800 mm	1500 mm	16,42 kg
WPCO90-HDG	900 mm	1500 mm	18,31 kg
WPCO100-HDG	1000 mm	1500 mm	20,22 kg

Roestvrij staal, volgens ASTM 304 / BS 304 S 3

Product	B	L	G
WPCO20-304	200 mm	3000 mm	5,10 kg
WPCO30-304	300 mm	3000 mm	8,75 kg
WPCO40-304	400 mm	3000 mm	11,12 kg
WPCO45-304	450 mm	3000 mm	15,38 kg
WPCO50-304	500 mm	1500 mm	8,43 kg





Product	B	L	G
WPCO60-304	600 mm	1500 mm	9,91 kg
WPCO70-304	700 mm	1500 mm	13,67 kg
WPCO75-304	750 mm	1500 mm	15,48 kg
WPCO80-304	800 mm	1500 mm	15,45 kg
WPCO90-304	900 mm	1500 mm	17,22 kg
WPCO100-304	1000 mm	1500 mm	19,00 kg

Roestvrij staal volgens ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	B	L	G
WPCO20-316	200 mm	3000 mm	5,16 kg
WPCO30-316	300 mm	3000 mm	8,86 kg
WPCO40-316	400 mm	3000 mm	11,26 kg
WPCO45-316	450 mm	3000 mm	15,57 kg
WPCO50-316	500 mm	1500 mm	8,54 kg
WPCO60-316	600 mm	1500 mm	10,04 kg
WPCO70-316	700 mm	1500 mm	13,84 kg
WPCO75-316	750 mm	1500 mm	14,74 kg
WPCO80-316	800 mm	1500 mm	15,64 kg
WPCO90-316	900 mm	1500 mm	17,44 kg
WPCO100-316	1000 mm	1500 mm	19,24 kg

B: breedte
L: lengte
G: gewicht

OPTIONELE TOEBEHOREN

WPDUK

