


## KHA 7

profile rail 39.5x22 mm, perforated

Profile rail 39.5x22x1.50 mm, with continuous perforation 11x30, slot size 18 mm

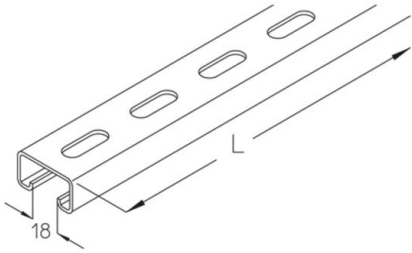

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	L	t	G
KHA 7-02S	22 mm	39,5 mm	200 mm	1,50 mm	0,21 kg
KHA 7-03S	22 mm	39,5 mm	300 mm	1,50 mm	0,31 kg
KHA 7-04S	22 mm	39,5 mm	400 mm	1,50 mm	0,41 kg
KHA 7-05S	22 mm	39,5 mm	500 mm	1,50 mm	0,51 kg
KHA 7-06S	22 mm	39,5 mm	600 mm	1,50 mm	0,61 kg
KHA 7-07S	22 mm	39,5 mm	700 mm	1,50 mm	0,78 kg
KHA 7-08S	22 mm	39,5 mm	800 mm	1,50 mm	0,83 kg
KHA 7-09S	22 mm	39,5 mm	900 mm	1,50 mm	1,00 kg
KHA 7-10S	22 mm	39,5 mm	1000 mm	1,50 mm	1,05 kg
KHA 7-11S	22 mm	39,5 mm	1100 mm	1,50 mm	1,15 kg
KHA 7-12S	22 mm	39,5 mm	1200 mm	1,50 mm	1,26 kg
KHA 7-13S	22 mm	39,5 mm	1300 mm	1,50 mm	1,36 kg
KHA 7-14S	22 mm	39,5 mm	1400 mm	1,50 mm	1,47 kg
KHA 7-15S	22 mm	39,5 mm	1500 mm	1,50 mm	1,57 kg
KHA 7-20S	22 mm	39,5 mm	2000 mm	1,50 mm	2,20 kg
KHA 7-30S	22 mm	39,5 mm	3000 mm	1,50 mm	3,20 kg
KHA 7-60S	22 mm	39,5 mm	6000 mm	1,50 mm	6,30 kg

### Stainless steel, according to ASTM 304 / BS 304 S 3







Product	H	B	L	t	G
KHA 7-01E	22 mm	39,5 mm	100 mm	1,50 mm	0,11 kg
KHA 7-02E	22 mm	39,5 mm	200 mm	1,50 mm	0,22 kg
KHA 7-03E	22 mm	39,5 mm	300 mm	1,50 mm	0,33 kg
KHA 7-04E	22 mm	39,5 mm	400 mm	1,50 mm	0,44 kg
KHA 7-05E	22 mm	39,5 mm	500 mm	1,50 mm	0,55 kg
KHA 7-06E	22 mm	39,5 mm	600 mm	1,50 mm	0,66 kg
KHA 7-07E	22 mm	39,5 mm	700 mm	1,50 mm	0,77 kg
KHA 7-08E	22 mm	39,5 mm	800 mm	1,50 mm	0,88 kg
KHA 7-09E	22 mm	39,5 mm	900 mm	1,50 mm	0,99 kg
KHA 7-10E	22 mm	39,5 mm	1000 mm	1,50 mm	1,10 kg
KHA 7-11E	22 mm	39,5 mm	1100 mm	1,50 mm	1,21 kg
KHA 7-12E	22 mm	39,5 mm	1200 mm	1,50 mm	1,32 kg
KHA 7-13E	22 mm	39,5 mm	1300 mm	1,50 mm	1,43 kg
KHA 7-14E	22 mm	39,5 mm	1400 mm	1,50 mm	1,54 kg
KHA 7-15E	22 mm	39,5 mm	1500 mm	1,50 mm	1,65 kg
KHA 7-20E	22 mm	39,5 mm	2000 mm	1,50 mm	2,20 kg
KHA 7-30E	22 mm	39,5 mm	3000 mm	1,50 mm	3,60 kg
KHA 7-60E	22 mm	39,5 mm	6000 mm	1,50 mm	6,60 kg


**H:** height  
**B:** width  
**L:** length  
**t:** material thickness  
**G:** weight

## DETAILS / APPLICATIONS



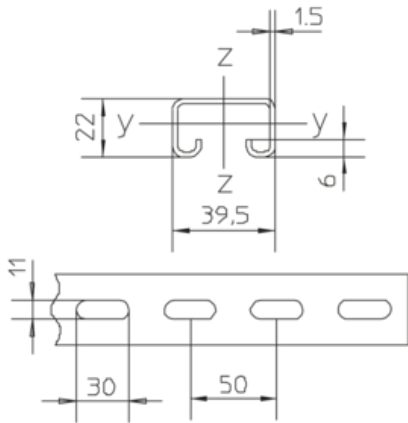

$$\begin{aligned}
 W_y &= 0.80 \text{ cm}^3 \\
 W_z &= 1.69 \text{ cm}^3 \\
 I_y &= 0.91 \text{ cm}^4 \\
 I_z &= 3.34 \text{ cm}^4
 \end{aligned}$$



$$\begin{aligned}
 W_y &= 0.80 \text{ cm}^3 \\
 W_z &= 1.69 \text{ cm}^3 \\
 I_y &= 0.91 \text{ cm}^4 \\
 I_z &= 3.34 \text{ cm}^4
 \end{aligned}$$

## OPTIONAL ACCESSORIES

SA 1, SAI 21, HS18, AM18, AMF18, ASK 8

